


Superior LineProtect Fibra user manual

Updated April 21, 2026

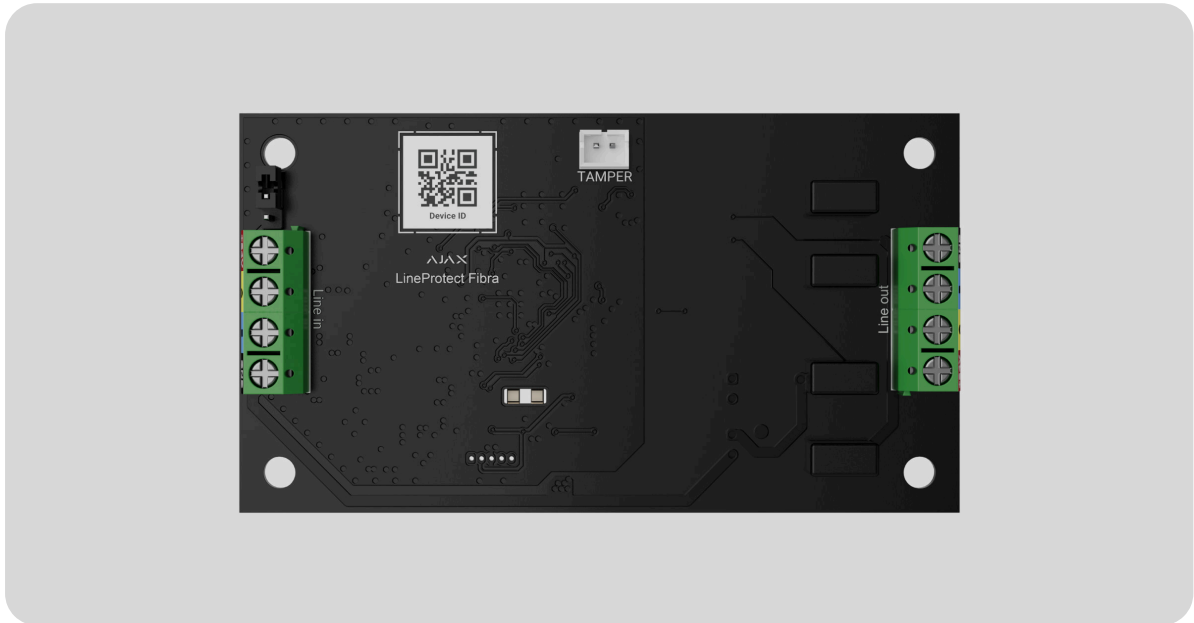


Superior LineProtect Fibra is a module designed to protect devices on the Fibra line from short circuit and sabotage: 110/230 V~ voltage supply to the line, hit with the stun gun.

The module works in an Ajax system and exchanges data with the hub using the secure Fibra wired communication protocol.

LineProtect is a part of the Fibra product line of wired devices. Only accredited Ajax Systems partners can buy, install, and administer Fibra products.

[Buy Superior LineProtect Fibra](#)

Functional elements

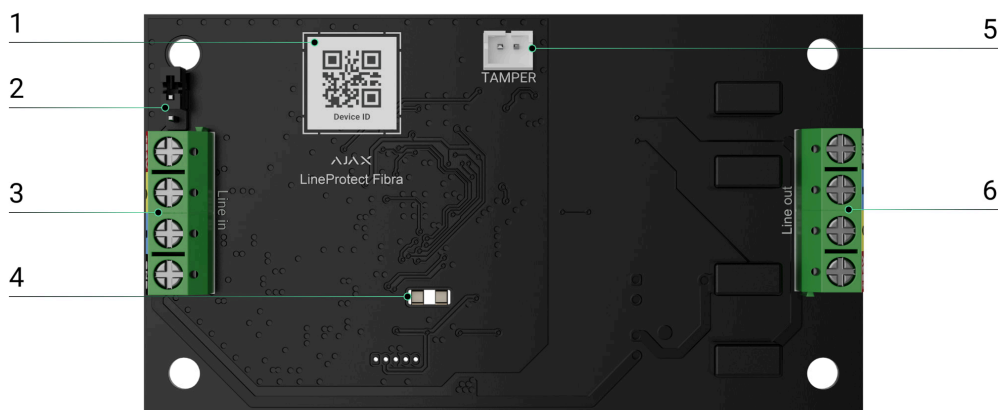

1. QR code with the device ID. It is used to pair this device with an Ajax system.
2. Terminating resistor jumper. It is installed on two contacts if LineProtect is the last device on the Fibra line. Otherwise, the jumper is either installed on one contact or not installed.
3. LineProtect input terminals.
4. LED indicators.
5. Connector to fasten the tamper board to the module. The tamper board is in Case that is sold separately.
6. Output terminals for connecting wired devices.

Compatible hubs


An Ajax hub is required for the module to operate.

Check device compatibility

Operating principle

LineProtect is a module designed to protect devices connected to the input line on the Fibra line in an Ajax system. It connects to any point of the Fibra line.

The module protects devices installed on the Fibra line between LineProtect and the hub, as well as the hub itself. LineProtect does not protect devices between the module and the end of the line.

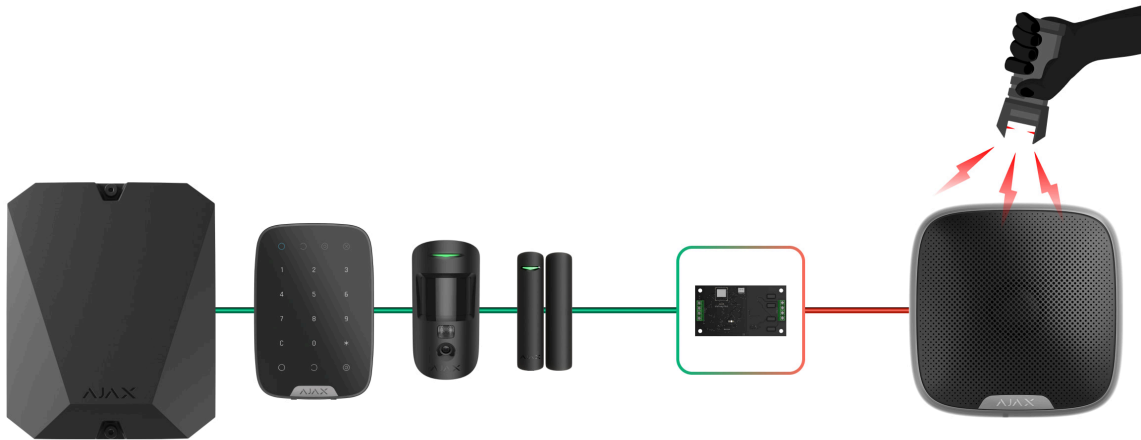

You need to connect one input and one output Fibra line to LineProtect. Use [Superior LineSplit Fibra](#) to divide the line. Do not install LineProtect on the Fibra line created in a **Ring** topology.

[Learn more](#)




Do not connect LineProtect modules one after another. You can connect one LineProtect to one Fibra line. After connecting the module, run the [Line power test](#). Otherwise, the device may operate incorrectly.


The module protects the hub and Fibra devices from the following threats:

- 110/230 V~ voltage supply.
- Short circuit on the line.
- Hit with the stun gun.
- Overvoltage on the Fibra signal lines.

LineProtect distinguishes the intervention type, and the system sends the corresponding notification to the Ajax apps.

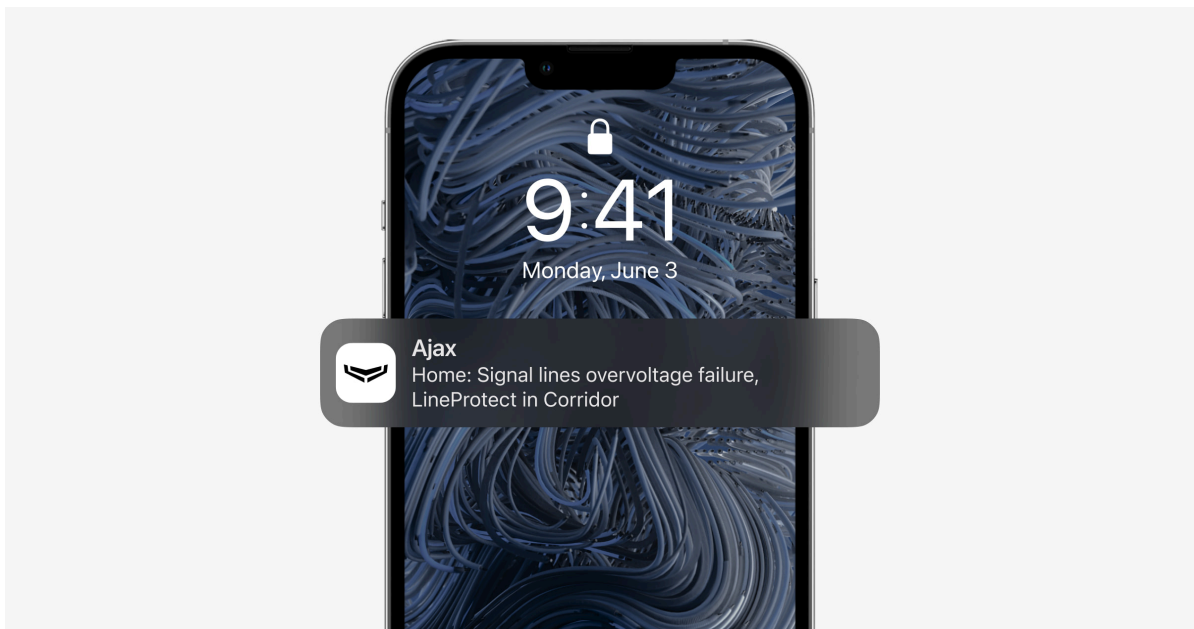

Fuses are triggered if an abnormal voltage is supplied on the Fibra line. In this case, LineProtect can fail, so it needs to be replaced. The users and the security company will receive the corresponding notification.

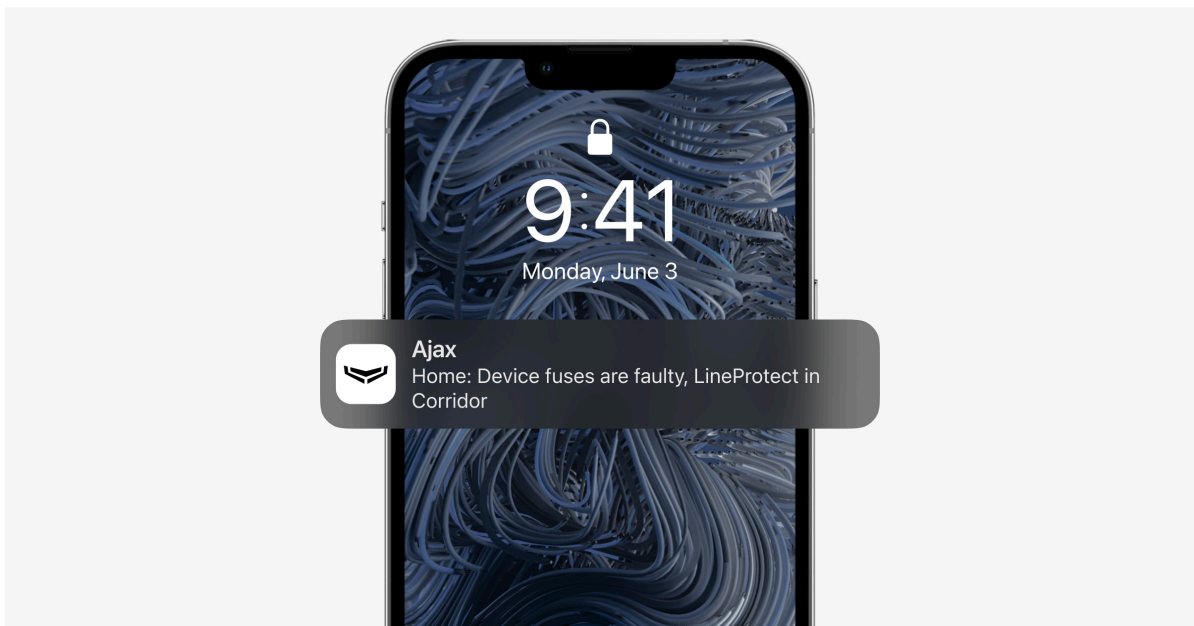

Fibra data transfer protocol

The module uses Fibra technology to transmit alarms and events. It is a wired data transfer protocol for fast and reliable two-way communication between the hub and connected devices.

[Learn more](#)

Sending events to the monitoring station

The Ajax system transmits alarms to the [PRO Desktop](#) monitoring app, as well as to the central monitoring station (CMS) using **SurGard (Contact ID)**, **SIA (DC-09)**, **ADEMCO 685**, and [other protocols](#).

LineProtect can transmit the following events:

1. Tamper alarm and turning off the alarm.
2. Low supply voltage and voltage return to normal values.
3. Loss and restoration of communication between LineProtect and the hub.
4. Permanent deactivation and activation of the device.
5. One-time deactivation and activation of the device.
6. Short circuit on the Fibra line and power supply restoration.
7. Overvoltage on the Fibra signal lines and voltage return to normal values.
8. Faulty fuse.

When an alarm is received, the CMS operator knows exactly what happened and where to send the rapid response team. The Ajax devices are addressable, meaning that PRO Desktop app and CMS receive events, device type, assigned name, and location (room, group). The list of transmitted parameters may differ depending on the CMS type and the selected communication protocol.



You can find the device ID, loop (zone) number, and line number in the device [States](#).

Selecting the installation site

LineProtect is installed in front of potentially vulnerable devices. An intruder can directly electrocute a street siren or a keypad in a public

space.




The module protects devices installed between LineProtect and the hub, as well as the hub itself. However, the module does not protect devices that have been directly subjected to high voltage.

When choosing a spot to install LineProtect, consider the parameters that affect the operation of the device:

- Fibra signal strength.
- The length of the cable for connecting LineProtect.
- The length of the cable for connecting wired devices to LineProtect.

Follow these recommendations when designing the Ajax system project for an object. Only professionals should design and install the security system. The list of authorized Ajax partners is [available here](#).

Installing into Case

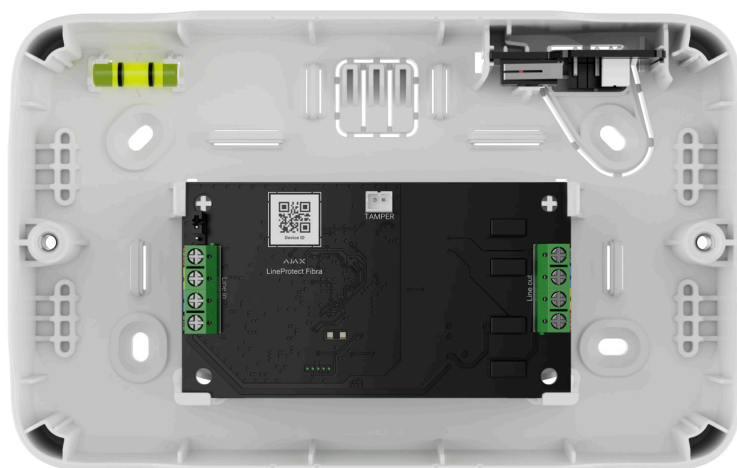

We recommend installing LineProtect into Case. The casing is sold separately and available in multiple versions. Installing a single module, several modules, or several other devices into Case is possible. Use [Case](#)

configurator to get the most optimal placement of your Fibra devices in the casing.



Case has mounts for the modules, wire channels, and a tamper that connects to the board of LineProtect.

[Learn more about Case](#)

LineProtect cannot be installed

1. Outdoors. It can damage the module.
2. Inside premises where temperature and humidity values do not correspond to the operating parameters. It can damage the module.
3. In places with low or unstable Fibra signal strength.

Fibra signal strength

Fibra signal strength is the ratio of undelivered or corrupted data packages to those expected over a specific time. The icon  in the **Devices**  tab in Ajax apps indicates the signal strength:

- **Three bars** – excellent signal strength.
- **Two bars** – good signal strength.
- **One bar** – low signal strength; stable operation is not guaranteed.
- **Crossed out icon** – no signal; stable operation is not guaranteed.

[What is Fibra Signal Strength Test](#)

Line power test

The test simulates the maximum energy consumption of devices connected to the hub. If the system passes the test successfully, all its devices have enough power in any situation.

During the test, LineProtect calibrates its output to the appropriate voltage. After calibration, the device becomes more sensitive to detecting sabotage, including short circuit. If you change the system configuration, you need to repeat the line power test to recalibrate the device according to the new network characteristics.



Run the **Line power test** after adding Superior LineProtect Fibra to the hub. Otherwise, the device may operate incorrectly.

After the test, the app displays a notification with the status of each line:

- Test passed.
- Test passed with malfunctions.
- Test failed.

What is Line power test

Designing the system project

It is crucial to properly design the system project to install and configure the devices correctly. The project must consider the number and types of devices at the object, their exact location and installation height, the length of wired Fibra lines, the cable type, and other parameters. Read [the article](#) to learn tips for designing the Fibra system project.

LineProtect can be connected at any point of the Fibra line. The output line of the device can have a length of up to 2,000 meters when connected using the U/UTP cat.5 4×2×0.51 mm (24 AWG) cable. Different types of devices can be connected to the output Fibra line. For example, you can use opening detectors, motion detectors, sirens, and keypads. The number of wired devices in the system is limited by the output current of the hub and its specifications. You can connect up to 100 devices to Superior Hub Hybrid.



To provide additional power to the line, install [Superior LineSupply Fibra](#).



Ajax systems support **Beam** and **Ring** topologies. However, do not install LineProtect on the Fibra line created in a **Ring** topology.

[More about topologies](#)

Cable length and type

Recommended cable types:

- U/UTP cat.5 4×2×0.51 mm (24 AWG) cable, copper conductor.
- 4×0.22 mm² signal cable, copper conductor.



The wired connection range may vary if you use a different cable type. No other types of cables have been tested.

Verification using a calculator

To ensure that the project is designed correctly and the system will work in practice, we have developed a [Fibra power supply calculator](#). It helps to check the communication quality and cable length for wired Fibra devices when designing the system project.

Preparing for installation

Cable arrangement

When preparing to lay cables, check the electrical and fire safety regulations in your region. Strictly follow these standards and regulations. Tips for cable arrangement are available in [the article](#).

Cable routing

We recommend you carefully read the [Selecting the installation site](#) section before installation. Do not deviate from the system project. Violating the basic LineProtect installation rules and the recommendations of this manual may lead to incorrect operation and loss of connection with the device. Tips for cable routing are available in [the article](#).


Preparing cables for connection

Remove the insulating layer and strip the cable with a special insulation stripper. The ends of the wires inserted into the device terminals must be tinned or crimped with a sleeve. It ensures a reliable connection and protects the conductor from oxidation. Tips for preparing the cables are available in [the article](#).

Installation and connection

Connecting Superior LineProtect Fibra to the hub

1. Prepare cable holes in advance by carefully breaking out the perforated parts of Case.
2. Secure Case with the bundled screws using at least two fixing points. Fix Case at a point with a perforated area so its tamper responds to disassembly attempts.
3. Turn off the power of lines in the [Ajax PRO app](#):
 1. Hub → Settings  → Lines → Lines Power Supply.
4. Route the cable to connect LineProtect to the hub casing. Connect the wires to the required hub line.

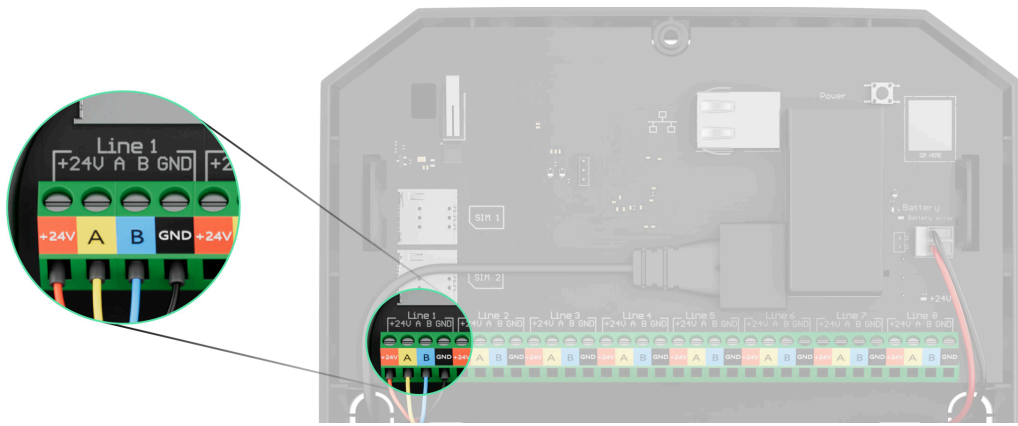


+24V – 24 V== power terminal.

A, B – signal terminals.


GND – ground.


5. Connect the wires to the LineProtect input terminals according to the diagram below. Follow the polarity and connection order of the wires. Securely fasten the cable to the terminals.

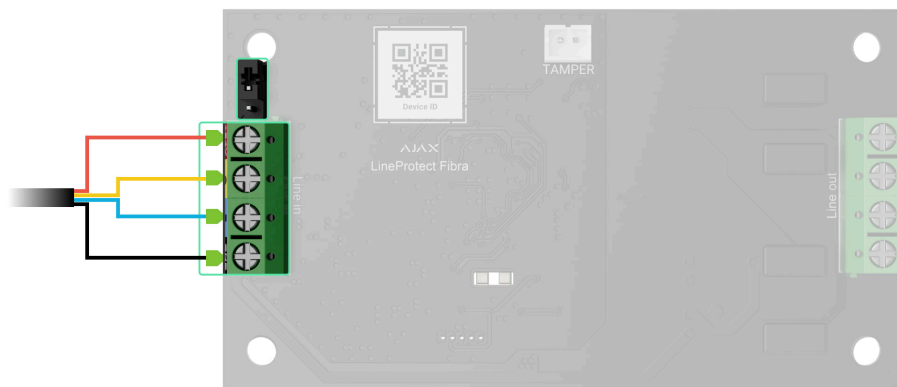

6. If **LineProtect** is the last one on the line, install a terminating resistor jumper on the two contacts. Otherwise, the terminating resistor jumper should remain installed on one contact or not be installed.

7. If **LineProtect** is not the last one on the line, connect the device's wires to the LineProtect output terminals according to the diagram below. Follow the polarity and connection order of the wires. Securely fasten the cable to the terminals.

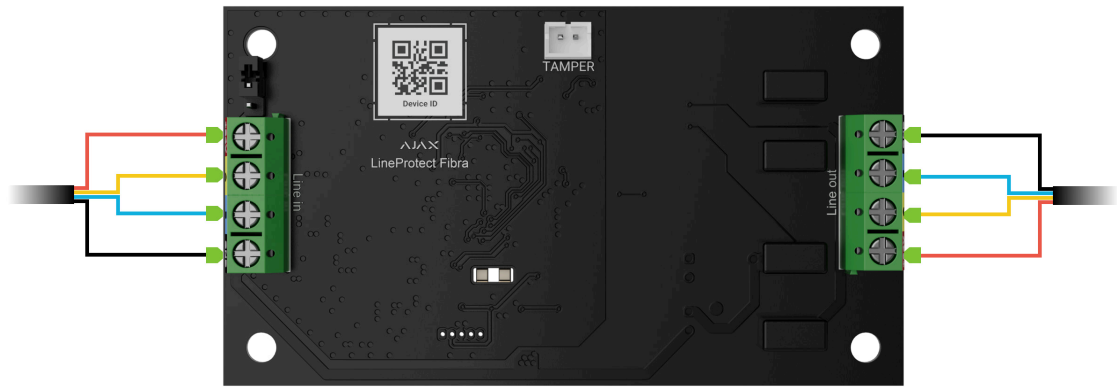

8. Secure the module in Case using holes in the board. Secure the cable with ties.
9. Connect the Case tamper to the appropriate module connector.
10. Place the lid on the casing and fasten it with the bundled screws.
11. Turn on the power supply of lines in the [Ajax PRO app](#):
 1. Hub → Settings  → Lines → Lines Power Supply.
12. [Add LineProtect to the hub](#).
13. Run the [functionality testing](#).



Run the [Line power test](#) after adding Superior LineProtect Fibrá to the hub. Otherwise, the device may operate incorrectly.

Adding to the system



[Check the device compatibility](#) before the module is added to the system. Only verified partners can add and configure Superior devices in [Ajax PRO apps](#).

[Types of accounts and their rights](#)

Before adding a device

1. Install an [Ajax PRO app](#).
2. Log in to a [PRO account](#) or create a new one.
3. Select a space or create a new one.

What is a space

How to create a space


4. Add at least one virtual room.
5. Add a [compatible hub](#) to the space. Ensure the hub is switched on and has internet access via Ethernet, Wi-Fi, and/or mobile network.
6. Ensure the space is disarmed, and the hub is not starting an update by checking statuses in the Ajax app.

How to add Superior LineProtect Fibra

Two ways to add devices are available in the Ajax PRO app: automatically and manually.

Automatically Manually

To add a device automatically:

1. Open the [Ajax PRO app](#). Select the hub to which you want to add Superior LineProtect Fibra.
2. Go to the **Devices**  tab and click **Add Device**.
3. Select **Add All Fibra Devices**. The hub will scan the Fibra lines. After scanning, all devices connected to the hub that still need to be added to the system will be shown.
4. Select the device from the list. After pressing, the LED indicator will flash to identify this device.

5. Set the device name, and specify the room and security group if **Group Mode** is enabled. Press **Save**.

If the connection fails, check the wired connection's correctness and try again. If the maximum number of devices has already been added to the hub, you will receive an error notification while adding.


LineProtect only works with one hub. The module stops exchanging data with the previous hub when pairing with a new one. When LineProtect is added to a new hub, it remains in the list of devices on the previous hub. You can remove it manually.

Functionality testing


Available for LineProtect:





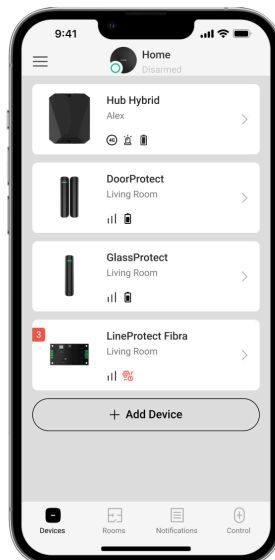


- **Fibra Signal Strength Test** – to determine the strength and stability of the signal at the device installation site.
- **Line power test** – to determine if there is enough power for all devices connected to the hub and calibrate the protection threshold.

Icons




The icons show some statuses of the device. You can check them in the Ajax apps:


1. Select a hub in the Ajax app.
2. Go to the **Devices**  tab.
3. Find **LineProtect** in the list.

Icon	Meaning
	Fibra Signal Strength – displays the signal strength between the hub and the module. Recommended values: 2–3 bars. Learn more
	LineProtect is permanently deactivated. Learn more
	In LineProtect, events of tamper triggering are permanently disabled. Learn more
	LineProtect is deactivated for one arming cycle.
	In LineProtect, events of tamper triggering are disabled for one arming cycle.
	The device has lost connection with the hub or the hub has lost connection with the Ajax Cloud server.
	The device has not been transferred to the new hub. Learn more

States

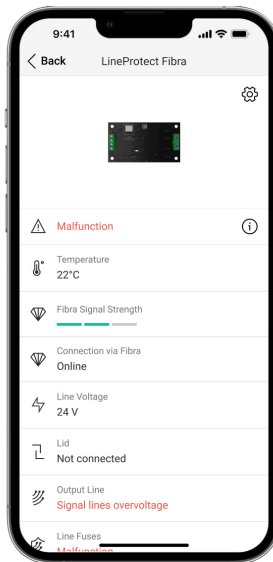

The states display information about the device and its operating parameters. You can check the LineProtect states in the Ajax apps:

1. Select a hub in the Ajax app.
2. Go to the **Devices**  tab.
3. Select **LineProtect** from the list of devices.


Parameter	Meaning
Data import	<p>Displays the error when transferring data to the new hub:</p> <ul style="list-style-type: none"> • Failed – the device has not been transferred to the new hub. <p><u>Learn more</u></p>
Temperature	<p>Module temperature.</p> <p>The acceptable error between the value in the app and the temperature at the installation site: 2 °C.</p> <p>The value is updated as soon as the module detects a temperature change of at least 1 °C.</p>

	<p>You can create a scenario by temperature to control automation devices.</p> <p><u>Learn more</u></p>
<p>Fibra Signal Strength</p>	<p>Signal strength between the hub and Superior LineProtect Fibra. Recommended values: 2–3 bars.</p> <p>Fibra is a protocol for transmitting events and alarms.</p> <p><u>Learn more</u></p>
<p>Connection via Fibra</p>	<p>The status of connection between the hub and the module:</p> <ul style="list-style-type: none"> • Online – the module is connected to the hub. • Offline – the module has lost connection with the hub. Check the module connection to the hub.
<p>Line Voltage</p>	<p>The voltage value on the Fibra line to which the module is connected.</p>
<p>Lid</p>	<p>The tamper status that responds to the detachment of the device from the surface or violation of the device’s casing integrity:</p> <ul style="list-style-type: none"> • Not connected – the tamper is not connected to LineProtect. • Closed – the module is installed into Case; the tamper is connected. The casing is in a normal state. • Front lid open – the integrity of the casing is violated. Check the casing state. • Detached from surface – the module is removed from the mount in the casing. Check the mounting.

	<p><u>Learn more</u></p>
Output Lines	<p>Shows the output line status:</p> <ul style="list-style-type: none"> • OK – devices on the output line operate in normal mode and transmit all events. • Shorted out – the short circuit on the output line was detected. • Signal lines overvoltage – the high voltage on the signal lines was detected. Check the polarity and connection order of the wires.
Line Fuses	<p>The status is shown after line fuses triggering:</p> <ul style="list-style-type: none"> • Malfunction – due to the sabotage on the line, device fuses are faulty. The module and devices connected to the output line do not operate. LineProtect needs to be replaced.
Permanent Deactivation	<p>Shows the status of the device permanent deactivation function:</p> <ul style="list-style-type: none"> • No – the device operates in normal mode and transmits all events. • Entirely – the device does not notify about alarms or malfunctions, and cannot execute scenarios and system commands. • Lid Only – notifications on the tamper triggering are disabled. <p><u>Learn more</u></p>
One-Time Deactivation	<p>Shows the status of the device deactivation for one arming cycle function:</p> <ul style="list-style-type: none"> • No – the device operates in normal mode and transmits all events.


	<ul style="list-style-type: none"> • Entirely – the device does not notify about alarms or malfunctions, and cannot execute scenarios and system commands for one arming cycle. • Lid Only – notifications on the tamper triggering are disabled for one arming cycle.
Firmware	LineProtect firmware version.
Device ID	LineProtect ID/Serial Number. Also available on the device board and its packaging.
Device No.	LineProtect loop (zone) number.
Line No.	The Fibra line number of the hub to which LineProtect is connected.

Settings

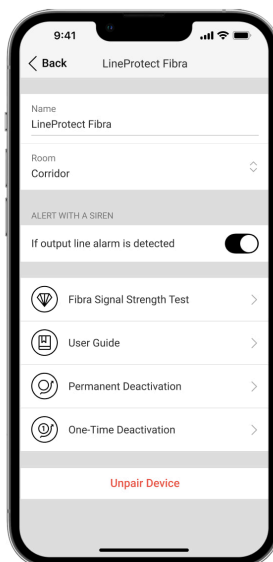

To change module settings in an Ajax app:

1. Go to the **Devices**  tab.

2. Select **LineProtect** from the list.
3. Go to **Settings** by clicking on the gear icon .
4. Set the required parameters.
5. Click **Back** to save the new settings.

Settings	Meaning
Name	<p>Name of the module. Displayed in the list of hub devices, text of SMS and notifications in the events feed.</p> <p>To change the name of the module, click on the text field.</p> <p>The name can contain up to 12 Cyrillic characters or up to 24 Latin characters.</p>
Room	<p>Selection of the LineProtect virtual room.</p> <p>The room name is displayed in SMS and notifications in the events feed.</p>
Alert with a siren if output line alarm is detected	<p>When the toggle is enabled, the <u>siren</u> activates when the output line alarm is detected.</p>
Fibra Signal Strength Test	<p>Puts the module into the Fibra Signal Strength Test mode.</p> <p>The test allows you to check the signal strength between the hub and LineProtect via the wired Fibra data transfer protocol to select the optimal installation site.</p> <p><u>Learn more</u></p>
User Guide	<p>Opens LineProtect User Manual in an Ajax app.</p>
Permanent Deactivation	<p>Allows the user to disable the device without removing it from the system.</p>

	<p>Three options are available:</p> <ul style="list-style-type: none"> • No – the device operates in normal mode and transmits all events. • Entirely – the device does not notify about alarms or malfunctions, and cannot execute scenarios and system commands. • Lid Only – notifications on the tamper triggering are disabled. <p>Learn more</p>
One-Time Deactivation	<p>Allows the user to disable the device for one arming cycle without removing it from the system.</p> <p>Three options are available:</p> <ul style="list-style-type: none"> • No – the device operates in normal mode and transmits all events. • Entirely – the device does not notify about alarms or malfunctions, and cannot execute scenarios and system commands for one arming cycle. • Lid Only – notifications on the tamper triggering are disabled for one arming cycle.
Unpair Device	Unpairs LineProtect from the hub and deletes its settings.

Indication

Event	Indication	Note
Adding a module	When added automatically – the green LED flashes quickly when LineProtect	

	<p>is selected from the list. When you click Add device, the green LED flashes once.</p> <p>When added manually – the green LED flashes once.</p>	
Removing the module	The green LED flashes six times.	
Tamper triggering	The green LED flashes once.	
Line power test	The green and red LEDs are glowing continuously during the test.	
Low voltage on the output line	The green LED lights up smoothly and goes out smoothly.	Voltage of 7 V _{DC} or less is considered low.
Short circuit on the line	The red LED flashes 4 times per second for 12 seconds.	After 12 seconds, LineProtect attempts to restore power to the output lines. If the fault has not been cleared, the module repeats turning off. The actions are repeated until the correct state of the line is restored.
Overvoltage on the line	The red LED flashes 4 times per second for 12 seconds.	After 12 seconds, LineProtect attempts to restore power to the output lines. If the fault has not been cleared, the module repeats turning off. The actions are repeated until the correct state of the line is restored.
Faulty fuses	The red LED flashes 4 times per second for 12 seconds.	After 12 seconds, LineProtect attempts to restore power to the output lines. If the fault has not been cleared, the module repeats turning off. The actions are repeated until the correct state of the line is restored.

Maintenance

The device does not require maintenance.

Technical specifications

All technical specifications

Compliance with standards

Setup in compliance with EN 50131 requirements

Warranty

Warranty for Limited Liability Company “Ajax Systems Manufacturing” products are valid for 2 years after purchase. Faulty fuse is not a warranty case.

Please contact Ajax Technical Support first if the device does not function correctly. In most cases, technical issues can be resolved remotely.

Warranty obligations

User Agreement

Contact Technical Support:

- e-mail
- Telegram

Manufactured by “AS Manufacturing” LLC

