

Tech specs

EN54 LINE

EN54 FireProtect (Sounder/VAD) Jeweller

Wireless addressable fire alarm sounder combined with a visual alarm device (VAD)



Device compatibility

Check

Communication

Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced sabotage protection.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

[Learn more](#) >

Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,700 m

Between the device and control and indicating equipment (CIE) or a range extender in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data is protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more

Alarm annunciation

Alarm type

acoustic and light

A sounder and LED frame.

Sound volume

At a distance of 1 m

Tone 1: 970 Hz – min 71, max 100 dB

Tone 2: 800 Hz / 970 Hz @ 2 Hz – min 76, max 100 dB

Tone 3: 800–970 Hz @ 1 Hz – min 76, max 96 dB

Tone 6: 554 Hz, 0.1 s / 440 Hz, 0.4 s – min 72, max 92 dB

Tone 7: 500–1200 Hz, 3.5 s / 0.5 s OFF – min 75, max 98 dB

Tone 13: 1200–500 Hz @ 1 Hz – min 75, max 98 dB

Adjusted by a PRO or user with admin rights in an Ajax app.

Current consumption in alarm mode

185 mA

Sound pattern

32 tones

Sound synchronization

An audible alarm is automatically synchronized on all devices with a sounder connected to the same CIE.

Flash frequency

90 ms ON / 1,910 ms OFF (cycle duration: 2,000 ms; frequency: 0.5 Hz)

Alarm annunciation test

To check the sound and visual alarm signals to ensure fire alarm signals are clearly audible and visible in the premises.

Installation recommendations

The device's recommended installation height is up to 3 m on the ceiling and up to 2.4 m on the wall.

The device is designed for outdoor and indoor use.

Sabotage protection

Tamper button


Fault notification when an attempt is made to remove the device from the mounting panel.

[Learn more](#) >

Lock for SmartBracket

to secure the device on the SmartBracket mounting panel

When locked, the lock secures the device and prevents it from being removed without a special tool.

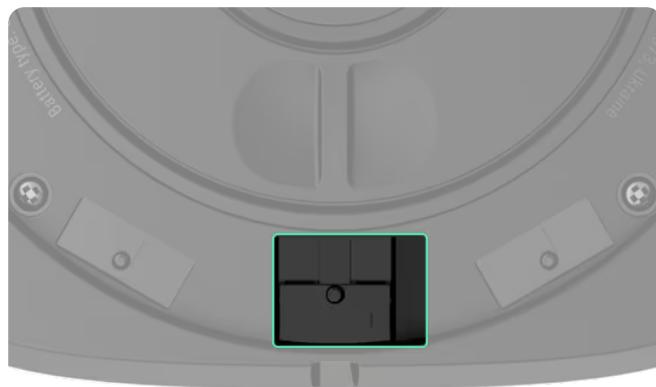

Protection against spoofing

device authentication

Connection loss detection

after 36 s

Detection time depends on **Jeweller** settings.

Power supply

Battery

4 × CR123A

Pre-installed.

Tool-free battery replacement

To replace the batteries, turn the battery compartment cover counterclockwise.



Reverse polarity protection

Prevents device damage if the batteries are put in incorrectly.

Recommended battery type

Huidrui CR123A; 3 V; 1,600 mAh,
LiMnO₂

Calculated battery life

up to 5 years

Enclosure

Dimensions

145 × 145 × 51 mm

Weight

561 g

Operating temperature range

from -10 °C to +60 °C

Operating humidity


up to 80%

Protection class

IP54

Flammability rating

UL 94 V-0

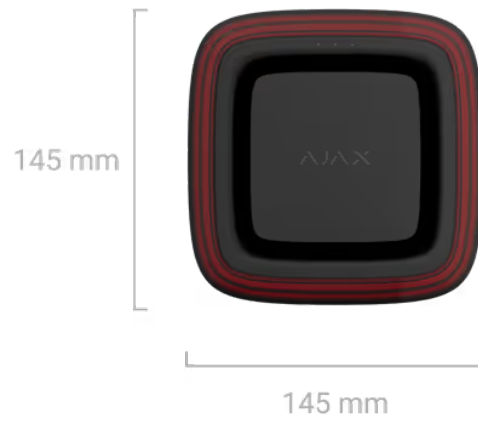

Color

Black

White



Red



Complete set

EN54 FireProtect (Sounder/VAD) Jeweller

4 × CR123A battery (pre-installed)

SmartBracket mounting panel

Installation kit

Quick start guide

Revision

Certification and compliance with standards



EN54 FireProtect (Sounder/VAD) Jeweller



Additional information

Compliance with standards

[Learn more >](#)

User manual

[Learn more >](#)

Warranty

24 months

[Learn more >](#)

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

[Request extra help](#)

✉ support@ajax.systems

🗉 @AjaxSystemsSupport_Bot

💬 Send a request



Rating 4.8

4,500,000

people worldwide under Ajax protection

💡 Suggest a feature



Products


- Intrusion protection
- Video surveillance
- Fire and life safety
- Comfort and automation
- All products
- Services
- System integrations
- Ajax Ready products
- Fibra wired protocol
- Ajax radio protocols

Solutions

- Customer stories
- Solutions by facility type
- Commercial fire detection and alarm system
- Wireless Grade 3 solution
- Video surveillance solution
- Integration with Yale smart locks
- Upgrades and retrofits
- Why Ajax
- How it works

Software

- Ajax Security System
- Ajax PRO: Tool for Engineers
- Ajax Desktop
- Ajax PRO Desktop
- Ajax TV
- Ajax Translator PRO
- Ajax Cloud Signaling
- Scenarios



Support

- Manuals and articles
- Compliance with standards

Tools

- Ajax device compatibility
- CMS software compatibility
- Ajax Services availability
- Video storage calculator
- Video device calculator

[Battery life calculator](#)

[Radio communication range calculator](#)

[Switches and outlets configurator](#)

[Fibra power supply calculator](#)

[All web tools](#)

Monitoring solutions and integrations

[Intrusion alarm monitoring](#)

[Video monitoring and visual alarm verification](#)

[Audio alarm verification](#)

Company

[Blog](#)

[About us](#)

[Press page](#)

[Events](#)

[Career](#)

[Ajax Next](#)

[Reviews and feedback](#)

For partners

[For partners](#)

[Ajax Academy](#)

[Partner Portal](#)

[!\[\]\(825ef57f9ac629b6776de1eb7bc7a4b7_img.jpg\) Србија](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved