


Universal electric strike

Fail-locked 17/27

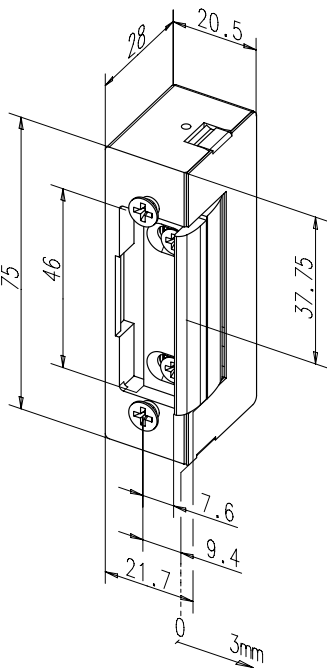

Universal strike standard with FaFix® (FF)

Model with basic features.

The advantages at a glance

- Suitable for all commonly used striking plates
- Can be mounted DIN right or left by turning over 180°
- Symmetrical design

Electrical data	6-12 V AC/DC	8-16 V AC/DC	24 V AC/DC	12 V 100% ED	24 V 100% ED
Rated resistance	9,1 Ω	22 Ω	43 Ω	44 Ω	200 Ω
AC current consumption	550 mA (6V) 1100 mA (12V)	310 mA (8V) 470 mA (12V) 620 mA (16V)	400 mA	-	-
Current consumption DC (stabilised)	660 mA (6V) 1300 mA (12V)	360 mA (8V) 550 mA (12V) 730 mA (16V)	550 mA	270 mA	120 mA
Operating noise during AC use	5	4 (8V) 5 (12V) 5 (16V)	-	-	-
Max. keeper pre-load AC	80 N (6V) 150 N (12V)	60 N (8V) 150 N (12V) 150 N (16V)	-	-	-
Max. keeper pre-load DC (stabilised)	10 N (6V) 50 N (12V)	10 N	-	10 N	10 N

Characteristics	Technical attributes
Adjustable keeper (FF, FaFix)	Break-in resistance
Adjustable strike (F, Fix)	Height
Monitoring contact (RR)	Width
Mechanical unlocking (E)	Depth
Diode (05)	Operating temperature range
Fail-locked	Installation position
Hold-open function	Material housing
	Material keeper
	Material surface-mounted attachment

DIN directions	
Universal	1
Voltage	
6-12 V AC/DC	D1
8-16 V AC/DC	R1
24 V AC/DC	F1
12 V 100% ED	E4
24 V 100% ED	F4
Order no.	
17-----	** *

Order suffix for model with hold open function = 27 -...