


Universal electric strike

Fail-unlocked 37

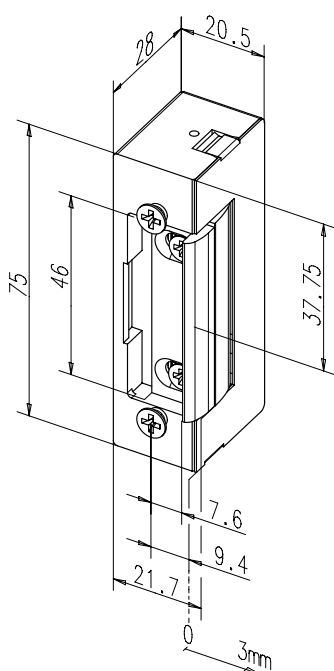

Universal strike standard with FaFix® (FF)

Model with basic features.

The advantages at a glance

- Suitable for all commonly used striking plates
- Can be mounted DIN right or left by turning over 180°
- Symmetrical design

Electrical data	12 V DC	24 V DC
Rated resistance	44 Ω	200 Ω
Current consumption DC (stabilised)	270 mA	120 mA
Max. keeper pre-load DC (stabilised)	10 N	10 N

Characteristics

Adjustable keeper (FF, FaFix)	•
Adjustable strike (F, Fix)	
Monitoring contact (RR)	
Diode (05)	
Fail-unlocked	•
Hold-open function	

Technical attributes

Break-in resistance	3500 N
Height	75 mm
Width	20,5 mm
Depth	28 mm
Operating temperature range	-15 °C to +40 °C
Installation position	vertical and horizontal
Material housing	Die-cast zinc
Material keeper	Die-cast zinc
Material surface-mounted attachment	Die-cast zinc

DIN directions

Universal	1
Voltage	
12 V DC	E9
24 V DC	F9

Order no.

37----- ** *