




User Manual

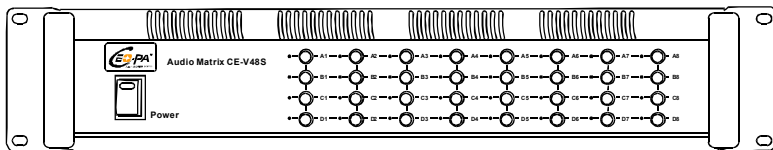


CE-V48S AUDIO MATRIX

FEATURES

- Select from four source inputs
- Select to eight power amplifier outputs
- volume control for each source
- Alarm input can force siren output

FRONT PANEL

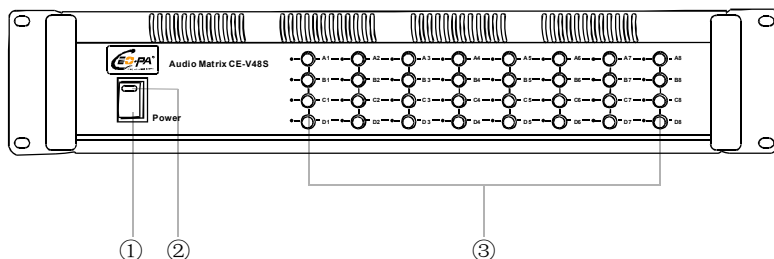


① Power switch

② Power indicator

③ Audio source selector

REAR PANEL AND CONNECTIONS

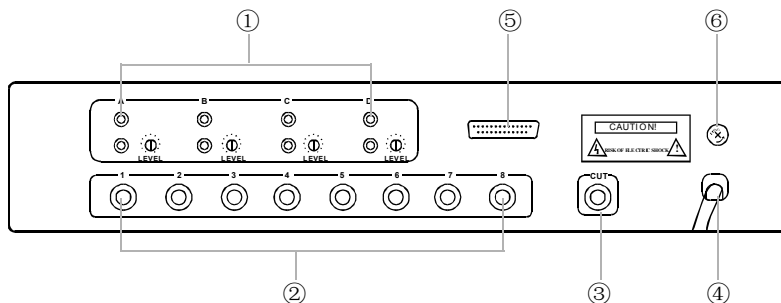

① Source Input

② Outputs to Amplifier

③ To Emergency Panel

④ AC Power Cord


⑤ 24VDC Input

⑥ Fuse

OPERATION

1. Connect to power source and turn on the unit.
2. Using the front panel pushbuttons, select the source for each amplifier.
3. Adjust the volume for each source by using the rear panel volume controls.
4. When triggered by the CE-V15E Emergency panel, an alarm signal will be output to the corresponding amplifier.

CONNECTION

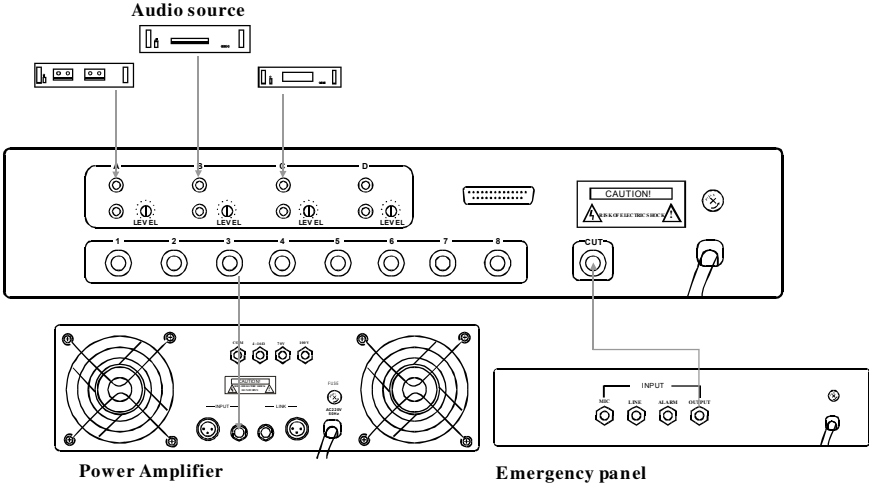

SPECIFICATIONS

Model	CE-V48S
Alarm Signal Input	ONE
Line In	4(A.B.C.D Optional) INPUT<200mV Imbalance
Line Output	8(1.2.3.4.5.6.7.8.Optional) OUTPUT>0.775V(0dB)
Alarm Signal In	Cut:<300mV. Imbalance
FREQ Response	60Hz~15KHz(±3dB)
Function Control	4Vol Controls, 1 Power switch, Channel select buttons 32.
Override Switch	DC 24V (Override switch 10mA)
Indicator	Power , Indicator (1~8xA~D, LED LIT Valid)
Power Cable	(3x0.75mm2)x1.5M (Standard)
Protection	AC FUSEx1Ax1
Power	AC220V±10% 50-60Hz
Power Comsumption	5~10W
Dimensions(LxWxH)	482x330x88mm
Net Weight	8Kg
Gross Weight	9Kg

Specifications are subject to change without notice.



CAUTION:Do not open the equipment cover arbitrarily,
so as not to electric shock.Please contact the professionals
to maintain if necessary .

CEOPA corporation
www.ceopa.com