

Tech specs

SUPERIOR

Case B (175)

Casing for one or two Fibra modules



Compatibility

Superior LineSplit Fibra >

Superior LineProtect Fibra >

Superior MultiRelay Fibra >

Devices installation

Number of devices

2

To install a different number of devices, select a model with the appropriate number of slots:

- [Case A \(106\)](#);
- [Case C \(260\)](#);
- [Case D \(430\)](#).

Which Case to choose >

Plastic latches

to secure devices

Slide the latches to remove the device.

Cable fasteners

to hold the cables together with ties

Plastic stoppers

to protect the installed devices

During drilling, the instrument rests on the Case stoppers.



Bubble level

To check the inclination angle of the casing during installation.

Recesses for drilling

Ø16 mm or Ø20 mm

The drill bit is fixed in the recess and does not move during drilling. We recommend using a hole saw for plastic.




Wider holes

To ensure that the casing is installed correctly, even if there are errors during installation.

Key features

Tamper board

Included in the Case complete set. The tamper board connects to the appropriate connector of one of the devices and protects the installed devices from sabotage.

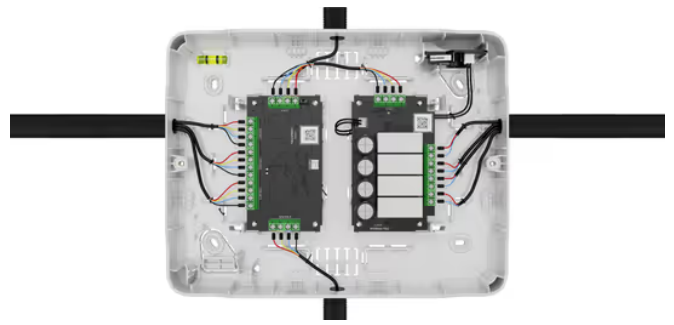

What is tamper >

Device rotation

by 180°

The devices can be rotated by 180°, giving two options for fixation.

Holding screws

in the casing lid

Rotate the lid

by 180°

The lid of Case B (175) can be rotated by 180° during installation.

Latches

to secure the lid during installation

The latches prevent the lid from falling off Case until it is secured with screws.

Recommendations

The device is designed for indoor use only. Case is produced in several versions.

Which Case to choose >

Product

Dimensions

175 × 225 × 57 mm

Weight

414 g

Operating temperature range

from -10 °C to +40 °C

Operating humidity

up to 75%



Color

Black



White



Complete set

Case B (175)

Tamper board

Installation kit

Quick start guide

Certification and compliance with standards



Case B (175)



Additional information

Compliance with standards

Learn more >

User manual

Learn more >

Warranty

24 months

Learn more >

Subscribe

Subscribe to our emails about secure life. No spam.



Request extra help

✉ support@ajax.systems

📧 @AjaxSystemsSupport_Bot

💬 Send a request



Rating 4.8

4,500,000

people worldwide under Ajax protection

💡 Suggest a feature



Products

Intrusion protection

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Software

Ajax Security System

Ajax PRO: Tool for Engineers

Ajax Desktop


Ajax PRO Desktop

Ajax TV

Ajax Translator PRO

Ajax Cloud Signaling

Scenarios



Solutions

Customer stories

Support

Manuals and articles

[Solutions by facility type](#)

[Compliance with standards](#)

[Commercial fire detection and alarm system](#)

[Wireless Grade 3 solution](#)

[Video surveillance solution](#)

[Integration with Yale smart locks](#)

[Upgrades and retrofits](#)

[Why Ajax](#)

[How it works](#)

Tools

[Ajax device compatibility](#)

[CMS software compatibility](#)

[Ajax Services availability](#)

[Video storage calculator](#)

[Video device calculator](#)

[Battery life calculator](#)

[Radio communication range calculator](#)

[Switches and outlets configurator](#)

[Fibra power supply calculator](#)

[All web tools](#)

Monitoring solutions and integrations

[Intrusion alarm monitoring](#)

[Video monitoring and visual alarm verification](#)

[Audio alarm verification](#)

Company

[Blog](#)

[About us](#)

[Press page](#)

[Events](#)

[Career](#)

[Ajax Next](#)

[Reviews and feedback](#)

For partners

[For partners](#)

[Ajax Academy](#)

[Partner Portal](#)

[!\[\]\(25303bcd0d082531e53b951fe6bc7a85_img.jpg\) Србија](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved