

Tech specs

SUPERIOR

Case D (430)

Casing for up to eight Ajax modules and two 18 Ah batteries



Device compatibility

Check

Compatibility

Superior MultiTransmitter Fibra (without casing) >

With battery up to 7 Ah.

Superior LineSplit Fibra >

Superior LineProtect Fibra >

Superior MultiRelay Fibra >

Superior LineSupply Fibra >

With batteries up to 18 Ah.

Devices installation

Number of devices

up to 8

To install a different number of devices, select a model with the appropriate number of slots:

- [Case A \(106\)](#);
- [Case B \(175\)](#);
- [Case C \(260\)](#).

Which Case to choose >

Plastic holders

Module Holder (type A)

Place the required number of Module Holder (type A) into the casing to accommodate Superior LineSplit Fibra, Superior LineProtect Fibra, and Superior MultiRelay Fibra modules. The Case D (430) complete set includes a total of 4 holders. If you need more, additional holders can be purchased separately.



[Buy Module Holder \(type A\)](#) >

Module Holder (type B)

Place two Module Holder (type B) into the casing to accommodate the Superior Hub Hybrid (4G) (without casing) and Superior MultiTransmitter Fibra (without casing) boards. Holders are sold separately.



[Buy Module Holder \(type B\)](#) >

Plastic rails

to secure Superior LineSupply Fibra

Slide Superior LineSupply Fibra along the rails to remove it from the casing. No holders are required to secure the module.



Cable fasteners


to hold the cables together with ties

Bubble level

To check the inclination angle of the casing during installation.

Recesses for drilling

Ø32 mm, Ø40 mm, or Ø63 mm

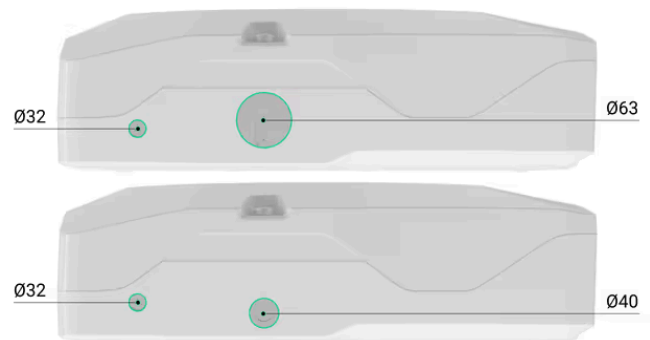


Wider holes

To ensure that the casing is installed correctly, even if there are errors during installation.

Holders for batteries

up to 18 Ah

At the bottom of the casing.

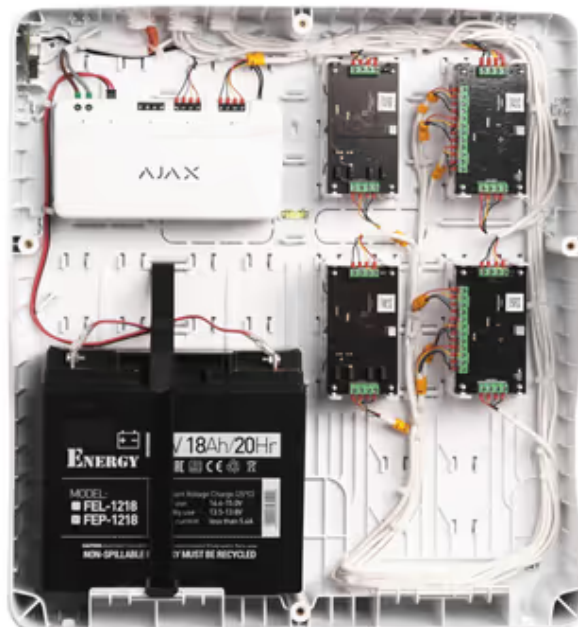

Holding stripe

for the battery

To prevent accidental dislodgement of the battery.

Key features

Tamper board

Included in the Case complete set. The tamper board connects to the appropriate connector of one of the devices and protects the installed devices from sabotage.

What is tamper >

Device rotation

by 180°

The devices in the casing can be rotated by 180°, providing two fixation options.

Holding screws

in the casing lid

Latches

to secure the lid during installation

The latches prevent the lid from falling off Case until it is secured with screws.

Recomendations

The device is designed for indoor use only. Case is produced in several versions.

Which Case to choose >

Product

Dimensions

430 × 400 × 133 mm

Weight of the black Case

3,343 g

Weight of the white Case

3,381 g

Operating temperature range

from -10 °C to +40 °C

Operating humidity

up to 75%



133 mm

Color

Black

White



Complete set

Case D (430)

Tamper board

Holding stripe for a battery

Module Holder (type A) – 4 pcs.

Installation kit

Quick start guide

Certification and compliance with standards



Case D (430)



Additional information

Compliance with standards

[Learn more >](#)

User manual

[Learn more >](#)

Warranty

24 months

[Learn more >](#)

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

✉ support@ajax.systems

📍 [@AjaxSystemsSupport_Bot](#)

💬 [Send a request](#)



Rating 4.8

4,500,000

people worldwide under Ajax protection

💡 [Suggest a feature](#)



Products

- Intrusion protection
- Video surveillance
- Fire and life safety
- Comfort and automation
- All products
- Services
- System integrations
- Ajax Ready products
- Fibra wired protocol
- Ajax radio protocols

Solutions

- Customer stories
- Solutions by facility type
- Commercial fire detection and alarm system
- Wireless Grade 3 solution
- Video surveillance solution
- Integration with Yale smart locks
- Upgrades and retrofits
- Why Ajax
- How it works

Software

- Ajax Security System
- Ajax PRO: Tool for Engineers
- Ajax Desktop
- Ajax PRO Desktop
- Ajax TV
- Ajax Translator PRO
- Ajax Cloud Signaling
- Scenarios



Available on
App Store



Available on
Google Play

Support

- Manuals and articles
- Compliance with standards

Tools

- Ajax device compatibility
- CMS software compatibility
- Ajax Services availability
- Video storage calculator
- Video device calculator
- Battery life calculator
- Radio communication range calculator
- Switches and outlets configurator
- Fibra power supply calculator
- All web tools

Monitoring solutions and integrations

- Intrusion alarm monitoring
- Video monitoring and visual alarm verification
- Audio alarm verification

Company

[Blog](#)
[About us](#)
[Press page](#)
[Events](#)
[Career](#)
[Ajax Next](#)
[Reviews and feedback](#)

For partners

[For partners](#)
[Ajax Academy](#)
[Partner Portal](#)

 [Србија](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)
[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved