

Products ▾

Assemble kit

Case E (395)

More ▾

Tech specs

Case E (395)

Waterproof casing for an Ajax hub with an internal battery. For outdoor and indoor use.



Device compatibility

Check

Compatibility

Hubs

Hub BP Jeweller (without casing) >

Superior Hub Hybrid 2 (without casing) >

Superior Hub Hybrid (4G) (without casing) >

Superior MegaHub (without casing) >

Modules

Superior LineSplit Fibra >

Superior LineProtect Fibra >

Superior MultiRelay Fibra >

Batteries¹

Internal battery NB (7.2V/95Ah) >

Internal battery NB (7.2V/190Ah) >

Internal battery RB (6.4V/36Ah) >

Internal battery RB (6.4V/78Ah) >

¹ Case E (395) supports the installation of third-party batteries. Verify the battery size before installation.

Key features

Number of devices

1 hub

1 module

[Case configurator](#) >

Plastic holders

Module Holder (type A)

To install the Superior MegaHub (without casing) and Hub BP Jeweller (without casing) boards.


The casing complete set includes two holders for Hub BP Jeweller (without casing). Additional holders can be purchased separately if required.



[Buy Module Holder \(type A\)](#) >

Module Holder (type B)

To install the Superior Hub Hybrid (4G) (without casing) and Superior Hub Hybrid 2 (without casing) boards. The holders are sold separately.

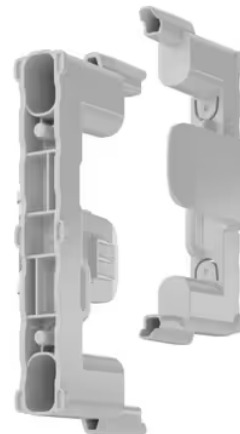

[Buy Module Holder \(type B\)](#) >

Cable fasteners

To secure the cables with ties.

Bubble level

To check the inclination angle of the casing during installation.

Drilling recesses

To route the cables into the casing.

Wide holes

To ensure the casing is installed correctly, even if mistakes are made during installation.



Battery holders

Located at the bottom of the casing.

Hook-and-loop fastener

for securing the battery

To prevent accidental battery dislodgement.

Captive screws

in the casing lid

Tamper boards

Included in the casing complete set. The tamper boards are connected to the appropriate device connector and protect the installed device from sabotage.

What is a tamper button >

Installation recommendations

The casing is designed for both outdoor and indoor use.

When routing cables into the casing, use waterproof cable glands with a protection class equal to or higher than the casing's IP rating.

Casing

Dimensions

395 × 300 × 110 mm

Weight for the casing in black

2.25 kg

Weight for the casing in white

2.31 kg

Operating temperature range

from -25 °C to +60 °C



Operating humidity

up to 95% with no condensation

Protection class

IP66, IK10

Color

Black



White



Complete set

Case E (395)

2 × Module Holder (type A)

2 × tamper board

2 × cable for connecting the tamper board

[Installation kit](#)

[Quick start guide](#)

Additional information

Compliance with standards

[Learn more >](#)

User manual

[Learn more >](#)

Warranty

24 months

[Learn more >](#)

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

 support@ajax.systems

 [@AjaxSystemsSupport_Bot](#)

 [Send a request](#)



Rating 4.8

4,500,000

people worldwide under Ajax protection

Suggest a feature



Products

- Intrusion protection
- Video surveillance
- Fire and life safety
- Comfort and automation
- All products
- Services
- System integrations
- Ajax Ready products
- Fibra wired protocol
- Ajax radio protocols

Solutions

- Customer stories
- Solutions by facility type
- Commercial fire detection and alarm system
- Wireless Grade 3 solution
- Video surveillance solution
- Integration with Yale smart locks
- Upgrades and retrofits
- Why Ajax
- How it works

Software

- Ajax Security System
- Ajax PRO: Tool for Engineers
- Ajax Desktop
- Ajax PRO Desktop
- Ajax TV
- Ajax Translator PRO
- Ajax Cloud Signaling
- Scenarios



Support

- Manuals and articles
- Compliance with standards

Tools

- Ajax device compatibility
- CMS software compatibility
- Ajax Services availability
- Video storage calculator
- Video device calculator
- Battery life calculator
- Radio communication range calculator
- Switches and outlets configurator
- Fibra power supply calculator

All web tools

Monitoring solutions and integrations

Intrusion alarm monitoring

Video monitoring and visual alarm verification

Audio alarm verification

Company

[Blog](#)

[About us](#)

[Press page](#)

[Events](#)

[Career](#)

[Ajax Next](#)

[Reviews and feedback](#)

For partners

[For partners](#)

[Ajax Academy](#)

[Partner Portal](#)

 [Србија](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)

[Anti-Spam Policy](#) [Ajax Services T&C](#) [End user agreement](#) [Warranty](#)

© 2026 AJAX SYSTEMS CH. All rights reserved