




User Manual

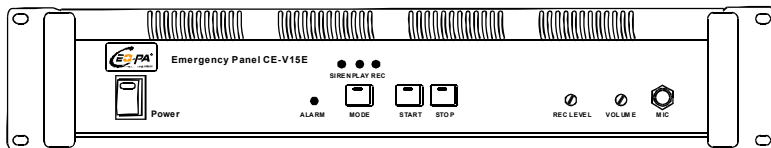


CE-V15E EMERGENCY PANEL

FEATURES


- Alarm triggered , siren or voice message output
- 60-second digital IC for voice message recording
- Record Level Control
- Volume Control

FRONT PANEL

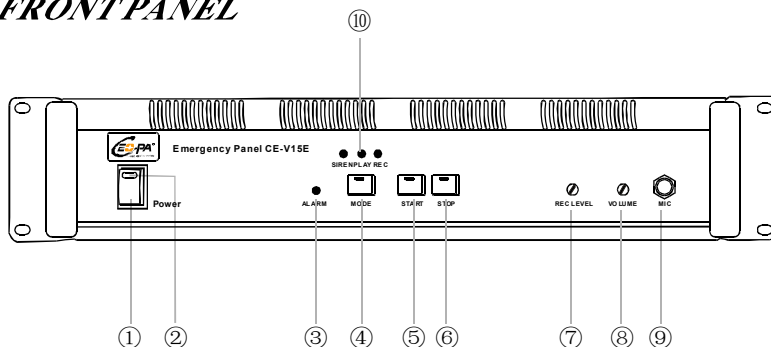


- | | | |
|------------------------------------|--------------------------------------|--------------------------|
| ① Power switch | ② Power indicator | ③ Alarm status indicator |
| ④ Select switch | ⑤ Start—starts recording or playback | |
| ⑥ Stop—stops recording or playback | ⑦ Record level control | |
| ⑧ Volume control | ⑨ MIC in | ⑩ Mode indicator |

REAR PANEL AND CONNECTIONS

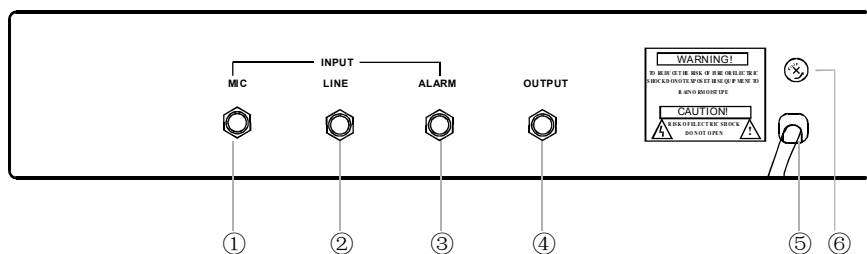

- | | |
|------------------------------------|-----------------|
| ① MIC INPUT—for message recording | ④ AUDIO OUTPUT |
| ② LINE INPUT—for message recording | ⑤ AC POWER CORD |
| ③ ALARM INPUT | ⑥ AC FUSE |

CONNECTION

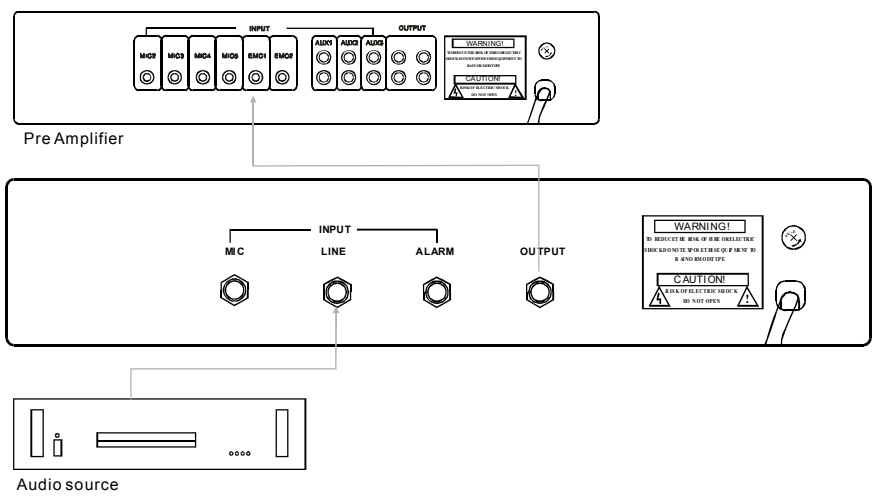

SPECIFICATIONS

MIC In	<500mV , 600 Ω , Imbalance
LINE In	<400mV,10K Ω , Imbalance
LINE Output	>200mV(Serin or record)
FREQ RESPONSE	100Hz~3.4KHz(±3dB)
THD	<0.01% at 1KHz
Record Time	1 Minute(Can be extended to 2, And 100000Times for RE-Record)
Protection	AC FUSEx0.5Ax1
Power	AC 220V±10% 50-60Hz
Power Comsumption	5~10W
Dimensions(LxWxH)	482x330x88mm
Net Weight	6.5Kg
Gross Weight	7.5Kg

Specifications are subject to change without notice.



CAUTION:Do not open the equipment cover arbitrarily,
so as not to electric shock.Please contact the professionals
to maintain if necessary .

CEOPA corporation
www.ceopa.com