




Features:

- ▲ Protection DC12V/ DC(AC)24V/ AC220V power;

Connection:

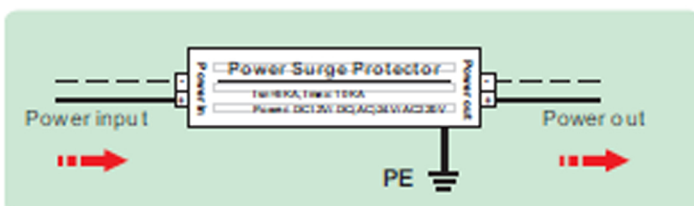

DC12V/ DC(AC)24V/ AC220V Power Supply Surge Protector

Model	CSP01-P12V	CSP01-P24V	CSP01-P220V
Rated work voltage	DC12V	DC/ AC 24V	AC220V
Max. work voltage	Max. DC18V	Max. DC47V	Max. AC470V
Nominal current	2.5KA (8/20 μ s)		
Max. current	5KA (8/20 μ s)		
Voltage protect level	<75V (10/700 μ s)	<120V (10/700 μ s)	<600V (10/700 μ s)
Reacting time	≤ 25 ns		
RLA	≤ 3 A		
Leakage current	≤ 5 μ A		
Connector type	Grip		
Dimension/ weight	65*25*25mm / 52g		
Test standard	IEC61643-21: 2000		