

Unmanaged Ethernet PoE Switches

HP2020-6T-POE-IN-V2



Features


- Multiple working modes to address your business needs: Default (Normal mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

Specifications

Model	HP2020-6T-POE-IN-V2
Hardware Specification	
Ports Type	6×100Mbps network ports (RJ45), including 4 PoE ports
Switching capacity	1.2 Gbps
Packet Buffer	570K bit
Forwarding performance	0.90Mpps
Power Supply	AC: 100 to 240V, 50/60Hz
MAC	2K
PoE Standard	IEEE 802.3 at, IEEE 802.3af
PoE Mode	ModeA (1236), ModeB (4578)
Max.PoE Power	Max capacity:65W Max capacity for single port: 30W
Prior Ports	1 to 2

Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Cooling Fans	0
Max.Power	75W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Operating Humidity	10% to 90% (noncondensing)
Indicator	<p>Power:</p> <p>Off: Abnormal power input</p> <p>Green: Normal power input</p> <p>Yellow: The total PoE power is higher than 85% of the total power of the device</p> <p>No PoE Indicator</p> <p>No PoE-Max Indicator</p> <p>LINK/ACT:</p> <p>Off: No link</p> <p>Steady on: Linked</p> <p>Flashing: Transmitting data</p>
Dimensions (WxDxH)	169*132*40mm
Weight	0.65KG
Working Mode	Default (Normal mode) : All ports can communicate with each other, EXTEND (Surveillance mode): Transmission distance up to 250 meters
Compliance	
NDAA Compliant	Support

Dimensions

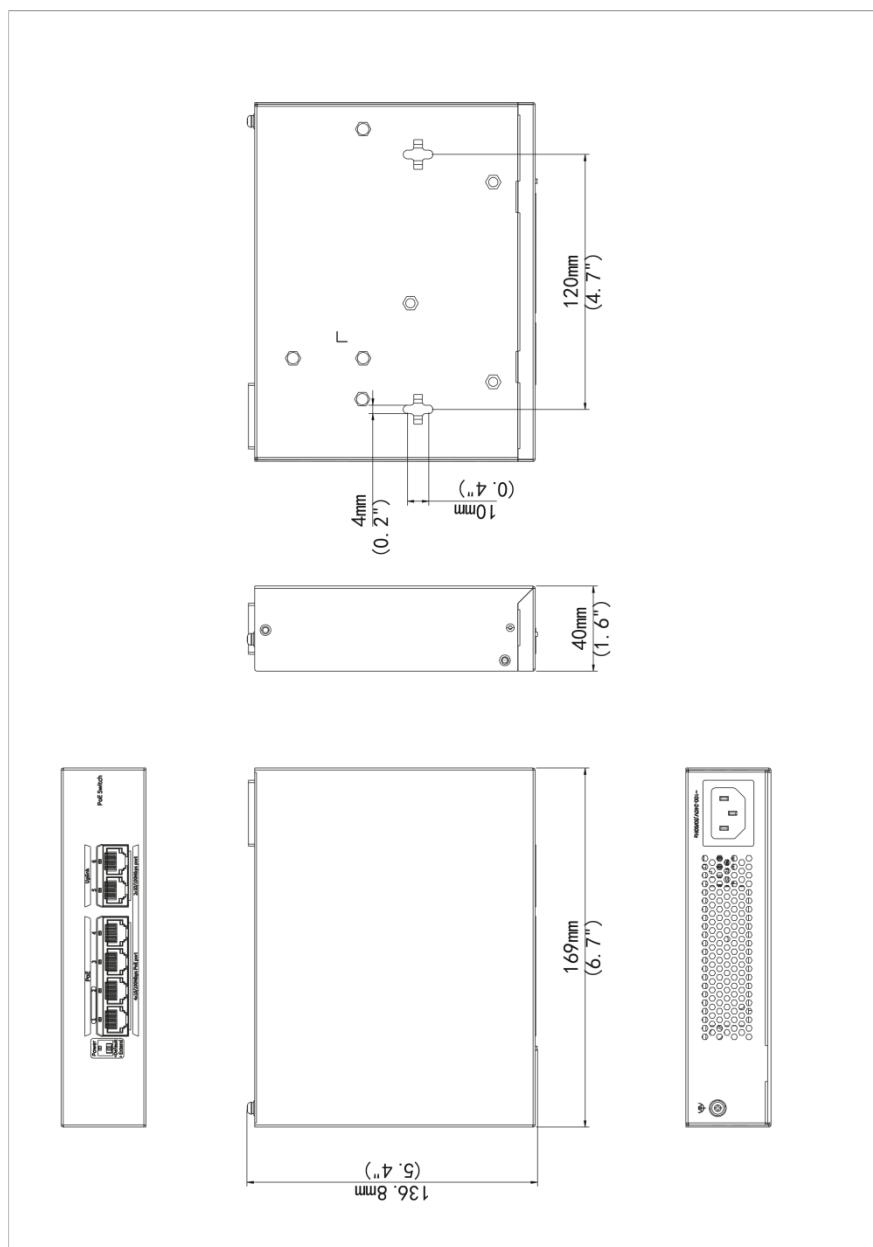

VIDEOMONT D.O.O.

PON-PET 08:00-16:00 h
SUB 09:00-13:00 h

Tošin tunar 166/2
11080 Novi Beograd
Republika Srbija



Kontakt telefon:
+381 11 311 64 16
office@videomont.rs