

# T-774PW 4" Two Way Wall Mount Speaker(2.5W-5W-10W-20W)

#### Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 4" +1.5" two ways speaker unit
- Power taps 2.5w-5w-10w-20w @100V plus 80hm
- Metal grille, ABS enclosure and stainless mounting bracket

#### Description

The T-774PW is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 4"+1.5" two ways speaker driver is designed of wide frequency response 130-14kHz, the multiple power taps 2.5W, 5W, 10W & 20W are helpful for different applications varies from room size and ambient noise surroundings.



The metal grille, ABS enclosure and stainless mounting bracket are of white color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


### **Specification**

Model	T-774PW
Power Taps @100V	2.5W, 5W, 10W, 20W
Power Taps @70V	1.25W, 2.5W, 5W, 10W, 20W
Transformer Impedance	4ΚΩ/2ΚΩ/1ΚΩ/500Ω/245Ω
Input	70V/100V/8Ω
SPL(1W/1M)	86dB
Max. SPL (Rated W/1M)	99dB
Frequency Response (-10dB)	130-18KHz
Finish	Baffle: ABS, Black/White Grille: Steel, Black/White
Speaker Driver	4" x 1 1.5"x1
Dimensions	222 x 160 x 160mm
Weight	2.3kg
Mounting	With mounting bracket fixed by screw




# T-774PW 4" Two Way Wall Mount Speaker(2.5W-5W-10W-20W)

Appearance:

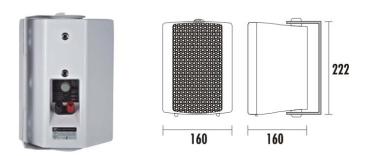

#### **Direction Diagram:**

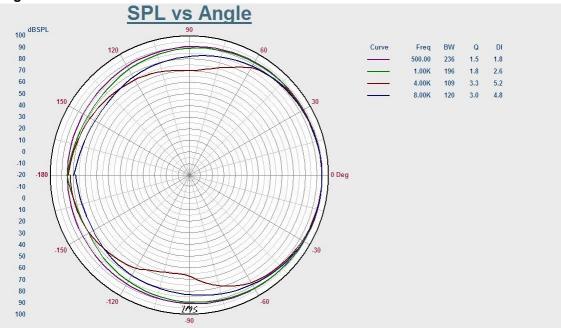

# Frequency Response:



Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn