

UV-XVR-104G3

Video recorder 5n1

Uniarch

4 CH HDTVI / HDCVI / AHD / CVBS

+ 2 extra IP

Audio

Supports 1 hard disk



Uniarch

DVR 5n1

4 BNC video CH (IP-replaceable)

AHD, TVI, CVI, CVBS, CVBS

48 Mbps bandwidth supported

Maximum IP resolution 4 Mpx

Maximum analog resolution 5 Mpx

Audio

HDMI and VGA output

RS485

2 x USB 2.0

Mouse

Space for 1 HDD up to 8 TB

WEB, CMS, Smartphone and NVR interface

ONVIF Compatible

Specifications

Brand	Uniarch
Video format	HDTVI / HDCVI / AHD / CVBS / IP
Video inputs	4CH BNC
Hybrid configuration	Up to 6 IP Channels (4Mpx) replacing all the BNC channels
Video outputs	1 HDMI Full HD, 1 VGA
Audio inputs	1 Channel RCA
Audio outputs	1 Channel RCA
Bidirectional audio	Reusing the audio input/output
Display resolution	1920x1080@60Hz, 1920x1080@50Hz, 1600x1200@60Hz, 1280x1024@60Hz, 1280x720@60Hz, 1024x768@60Hz
Maximum IP recording resolution	4 Mpx
Analog cameras supported	TVI / AHD: 5MP@20fps, 4MP@30fps,1080P@30fps, 720P@60fps
	CVI: 5MP@20fps, 4MP@30fps, 1080P@30fps, 720P@30fps
Main Stream recording encoding	5MPLite@12fps; 4MPLite@15fps; 1080P@15FPS; 720P@25FPS
Extra Stream recording encoding	D1@12FPS; D1@15FPS; D1@25FPS
Recording method	Manual, programmed, motion detection
Internal memory	1 HDD SATA 3.5" of up to 8TB (not included)
External interface	2 x USB (Mouse and backup) / RJ45 10M/100M/1000M (Ethernet) / RS485
Remote access	Web Browser, CMS Software (EZStation), Smartphone (EZView/EZLive)
Power	DC 12V / 8W
Dimensions / Weight	260mm × 218mm × 47mm / 1.1 kg

FARADAY®

FD372

FULL COLOR



SPECIFICATION

Model NO.	HI-88A2M-W
Camera SPEC	
Image Sensor	GC2053
DSP	FH8536H
Image Resolution	2.0MP
Mega Pixels	1920*1080
Video Output Mode	4 in 1
Usable Illumination	0.001Lux
TV System	PAL/NTSC
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s
Sync System	Internal
S/N Ratio	≥50dB
Scanning System	Progressive Scan
Camera Features	
Day/Night	FULL COLOR
OSD/UTC Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR
White Balance	Auto/ Manual
Gain Control	Auto
3D NR	3 DNR
WDR/DWDR	DWDR
Picture Adjustment	Yes
UTC Support	Yes
Lens	
Focus Length	3.6mm / 2.8mm optional
Focus Control	Fixed
Lens Type	Fixed
Auto Iris Support	NO
Night Vision	
Infrared LED	2PCS Warm Light LED
Infrared Distance	25M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
General	

Weatherproof Housing	Yes, Metal+Plastic
Anti-cut Bracket	YES
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 500mA
Dimension	187*60*72 mm
Weight	0.4kg

DC12V2A-IP66


Fuente de alimentación

Salida DC 12 V 2 A

1 salida

Jack estandar

Impermeable IP66

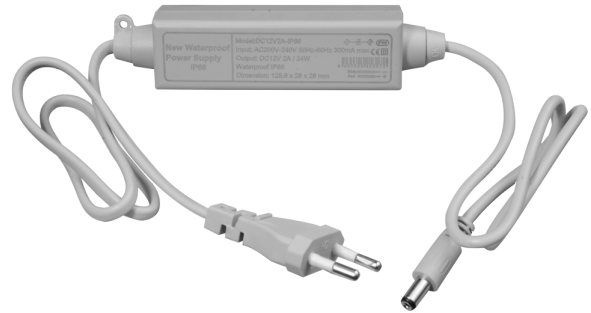

Alimentador

Salida DC 12V / 2 A

1 salida por jack de alimentación estándar

Impermeable IP66

Cable a enchufe incluido

Specifications

Entrada de alimentación	AC 200/240 V
Salida de alimentación	DC 12 V 2 A
Número de salidas	1
Potencia de salida	24 W
Temp. de funcionamiento	-20?°C ~ 45 °C
Dimensiones	125.6 x 28 x 28 mm