


PMD85: Spoljašnji PIR detektor V2.5

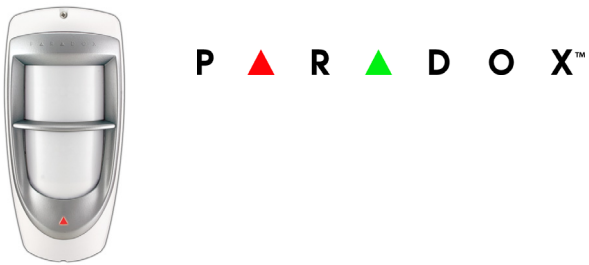

Tehničke karakteristike

Imk n_r`g j l m q r	MG5000, MG5050, MG6250, MG6130, MG6160, 1759MG, RTX3, RCV3, RX1
Rq n q c l x m p _	Dual Element Infrared (x2)
P_b l _ r c k n c p _ r s p _	-35°C bo +50°C (-31°F bo +122°F)
E c m k c r p g h _ q c l x m p _	Rectangular
L _ n _ h _ l h c	3 x "AA" alkaline bat c p p h c
R F f r e i t c l a _	433* g j g 868**MHz
q m r g t m	2nd generation Fresnel lens, LODIFF®, segments
B m k c r	35m (115ft) q _ MG6160 / MG6130 / MG6250 70m (230ft) q _ MG5000 / MG5500 / RTX3 / RX1
L _ n m l	4.5Vdc
T a m p e r n p c i g b _ r	Yes
@ p x g l _ p c _ e m t _ l h _	0.2m bo 3.5m/s (0.6ft bo 11.5ft/s)

Qjg i _ q l m m t _

