



Composition KIT BE20/210

Code	Description	QTY
BE20/200	Electromechanical actuator BRUSHLESS, low voltage, super intensive use, with native encoder onboard, irreversible, ideal for swing gates with leaf up to 2,5 mt lenght, with mechanical stopper in opening and closing.	2
B70/2DC/BOX	Digital control 24V for 2 BRUSHLESS motor, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70, EDGE and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F4ES	Pair of external photocells synchronized 24V AC/DC (max. 4 pairs).	1
FIFTHY/24	LED flashing light series FIFTHY 24V with integrated antenna.	1
R99/C/001	Signboard "Automatic Opening"	1

Product technical specifications	KIT BE20/210
Power line supply	230V AC - 50Hz
Motor power supply	24V
Power rating	200W
Frequency of use	Intensive use
Thrust	100 - 2200N
Operating temperature	-20 C° +55 C°
Protection level	IP43
Reductor Type	Irreversible
Manoeuvre speed	1,66 cm/s
Opening time at 90°	15-25 s
Stroke	400 mm
Limit switch	Mechanical stopper in opening and closing
Encoder	Digital native encoder SENSORLESS 48 PPR
Operating cycles per day (opening/closing - 24 hours no stop)	800
Maximum dimension product in mm (L x W x H)	867 x 105 x 155
Product weight packed (Kg)	20,3
Number items per pallet	21

ROGER TECHNOLOGY


Via S. Botticelli, 8 - 31021, Bonisiolo di Mogliano Veneto (TV) - ITALIA P.IVA 01612340263 Tel. +39 041 5937023 Fax +39 041 5973023
info@rogertechnology.it - www.rogertechnology.it

ROGER TECHNOLOGY

Via S. Botticelli, 8 - 31021, Bonisiolo di Mogliano Veneto (TV) - ITALIA P.IVA 01612340263 Tel. +39 041 5937023 Fax +39 041 5973023
info@rogertechnology.it - www.rogertechnology.it




PRODUCT DIMENSIONS

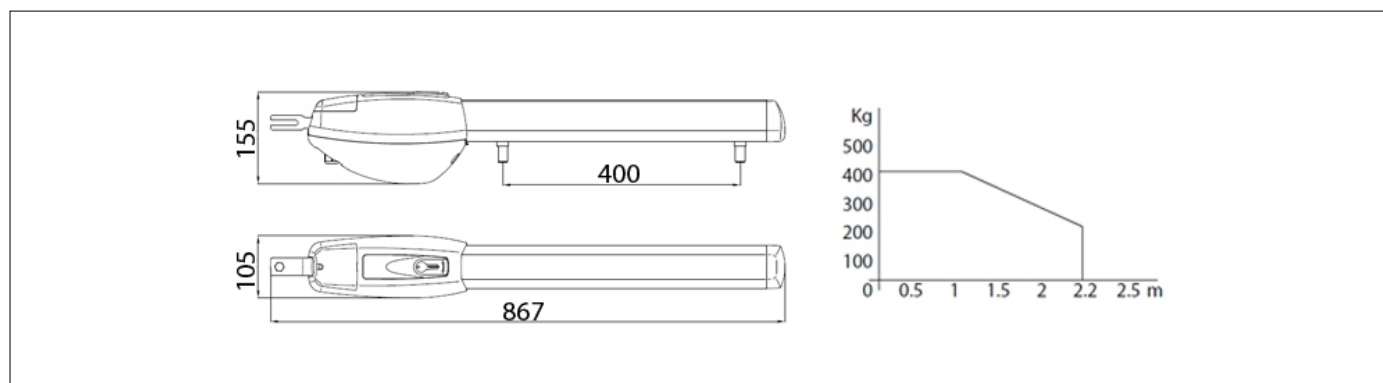

DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

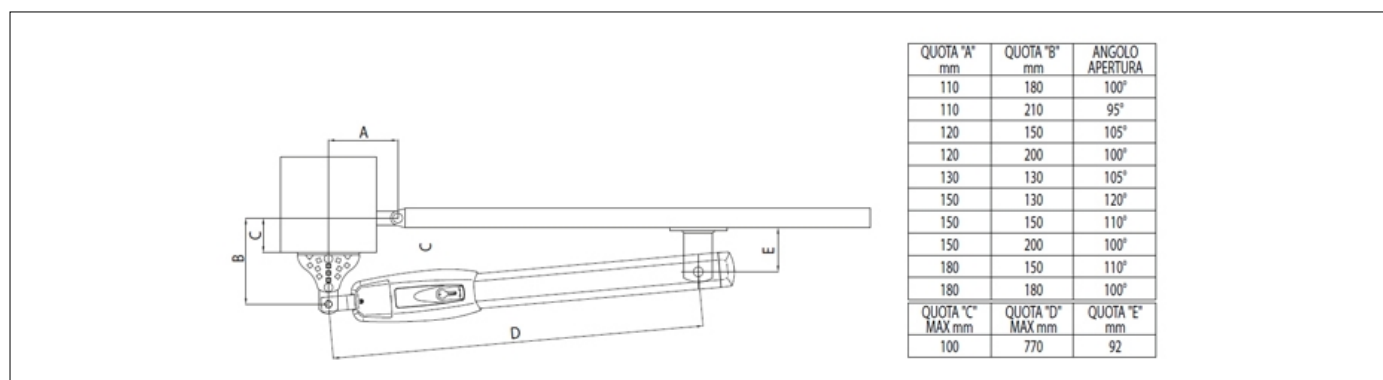

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES




MC781
Kit 2 mechanical
stop BR20, BE20
series, R20/300MS
and R20/500MS.




KT202
Short front hinge
plate, to weld.



KT204
Short rear hinge
plate, to weld.



KT206
Kit 3 hinge plates
short, to weld.



KT206/R
Kit of screw-
adjustable short rear
bracket and screw-
welded short front
bracket.