




Code	Description	Pcs/pallet
G30/1803	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 1800 kg with built-in control unit H70, optical encoder and mechanical limit switch.	40


Product technical specifications	G30/1803
Max gate weight	1800 kg
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	520W
Frequency of use	50%
Thrust	1200N
Operating temperature	-20+55°C
Reductor Type	Irreversible
Manoeuvre speed	9.5 m/min (0.16 m/s)
Motor thermal protection	150°C
Incorporated condenser	18 µF
Limit switch	Mechanical limit switch
Onboard control unit	H70/104AC
Encoder	Optical
Type exit gear	Z17/mod 4
Maximum dimension product in mm (L x W x H)	346 x 180 x 362
Product weight packed (Kg)	18,8
Number items per pallet	40

PRODUCT DIMENSIONS

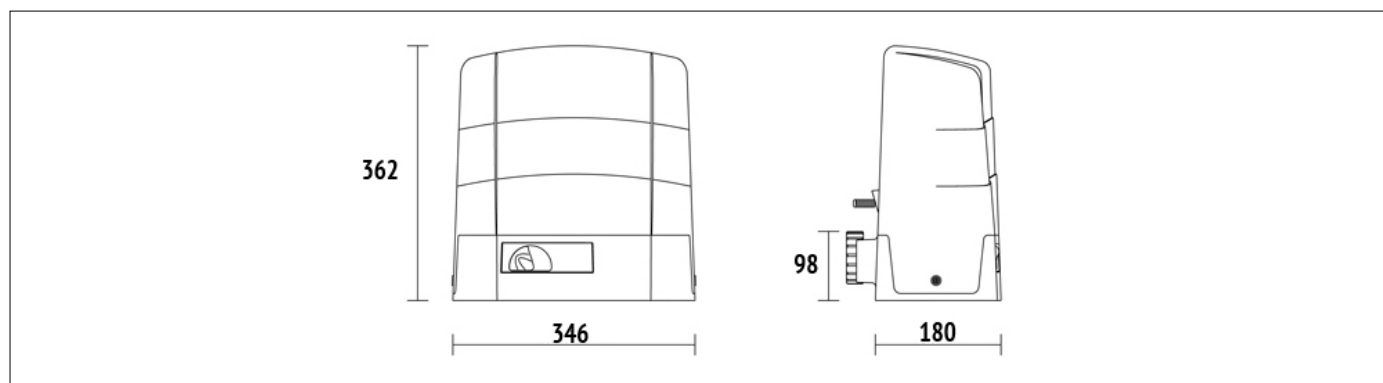


DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

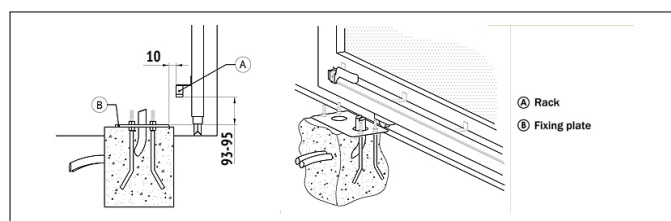


PREDISPOSITION FOR STANDARD INSTALLATION

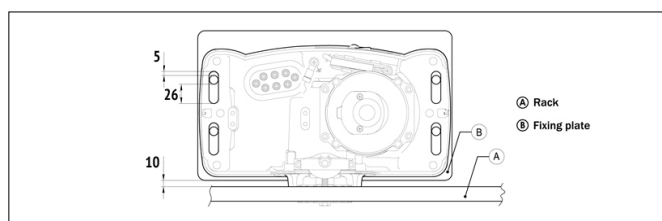


PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



KT215
Fixing plate with stay bolts and screws G30 series.




KT222
Raised fixing plate for G30 series (+3,5 cm).



GA550
Galvanised steel rack 22x22x1000 module 4.




GA551
Galvanised steel rack 30x12x1000 module 4 with spacers and screws.



GA553
Nylon rack module 4 with 6 connectors L.1000.



GA554
Pocket of 6 spacers (2,5 cm) and screws.



LT328
Z17 mod. 4 Pinion with increased thickness H.38 for series R30 - G30 - E30



LT331
Pinion Z11 mod. 6 only for series G30 - BG30



MC773
Kit mechanical limit switch for control unit H70/103AC, H70/104AC, B70/1DC, B70/1DCHP.



R99/C/001
Signboard Automatic Opening.