

Video-intercoms / Outdoors Station


SF-VI112-IPW-1MF

Outdoor station

Villa Outdoor Station

Villa video intercoms have a functional and robust design, equipped for all types of installations thanks to their IP or 2-wire communication modes. Complete visualization of the entire environment. Complete functionalities through the mobile application that allow remote opening, real-time viewing and notifications. The double relay output allows to control the main door, as well as a secondary one or the activation of a garage door. In addition, it allows a conventional 12V lock release to be powered from the panel itself

- Videointercom IP
- Communication Standard PoE, WiFi,
- Identification MF Card Reader
- Bidirectional Audio
- 2 relay for doors
- 2 Mpx Camera
- Mobile App
- Outdoor Installation & Antivandal

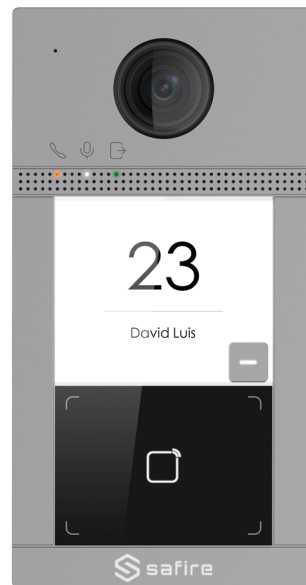

Technical Specification

Supplement light	IR supplement
Lens	1
FOV	Horizontal: 129° Vertical: 75°
Pixel	Main stream : 1920 × 1080 Sub stream : 720 × 480
Audio quality	Noise suppression and echo cancellation
Communication protocol	TCP/IP, RSTP, WiFi
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	Yes
Card Reader	MF Card 13.56MHz
Network interface	1
Exit button	2
Lock control	2
Door contact input	2
Power interface	1
Button	1 buttons
Installation	Surface mounting
Indicator	3
Weight	385g
Protective level	IP65, IK08
Power supply method	IEEE802.3af, standard PoE 12 VDC
Working temperature	-40° C to +55° C (-40° F to 131° F)
Working humidity	10% to 95%
Dimensions	174 mm × 91 mm × 29 mm
Application environment	Outdoor
Power consumption	≤ 10 W
Platform	Safire Connect & Safire Control Center