


Networking / Switches / Unmanaged

# SF-SW1208HIPOE-GF-120

SAFIRE

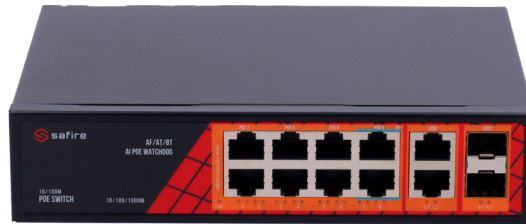

## Features

---

- Desktop Switch
- 6 PoE+ ports 30W RJ45 10/100/1000 Mbps
- 2 Hi-PoE+ ports 60W 802.3bt 10/100/1000Mbps + 2 Uplink SFP ports 10/100/1000Mbps
- 2 Uplink ports RJ45
- Supports PoE power supply up to 120W in total for all ports
- AI Watchdog

## Specifications

---

|                              |   |
|------------------------------|---|
| <b>Interface</b>             | 8 PoE ports + 2 Uplink SFP + 2 Uplink RJ45  |
| <b>Port speed RJ45</b>       | 8x 10/100/1000Mbps + 2x 10/100/1000Mbps + 2x 10/100/1000Mbps  |
| <b>PoE features</b>          | Up to 120W in total for all ports<br>Ports 1~6 PoE+ Up to 30W 802.3af/at<br>Port 7~8 Hi-PoE Up to 60W 802.3af/at/bt |
| <b>Transmission distance</b> | 130 meters  |
| <b>Bandwidth</b>             | 24Gbps  |
| <b>MAC Table</b>             | 8K  |
| <b>Latency</b>               | 10 to 100MBps < 16?s (using 64 packet size byte)  |
| <b>AI PoE</b>                | PoE Watchdog Ports 1~8 - Automatic restart of the power supply to a PoE port when a possible failure is detected.   |
| <b>Power</b>                 | Front Take 90~240V  |
| <b>Protections</b>           | 6KV against Rays<br>8KV ESD Protection  |
| <b>Operating temperature</b> | -30° C ~ 60° C  |
| <b>Dimensions</b>            | 187 x 139 x 43 mm   |
| <b>Weight</b>                | 1Kg   |