

SF-SW2824HIPOE-300

Safire Switch Hi-PoE

24 ports + 2 SFP Uplink + 2 Uplink

RJ45


Fast Ethernet port speed 10/100 Mbps

22 PoE+ Ports 30W + 2 Hi-PoE Ports

60W

PoE Watchdog

Up to 300W Total PoE Power

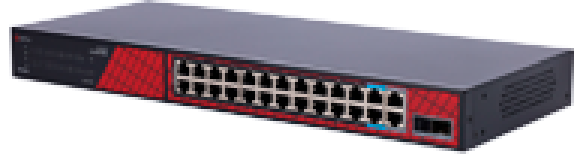

Desktop Switch

22 PoE+ ports 30W RJ45 10/100 Mbps

2 Hi-ports 60W Hi-portsPoE+ 802.3bt 10/100 2 Mbps + 10/100/1000Mbps Uplink SFP 2 + RJ45 Uplink 10/100/1000Mbps [%VAR%]

Supports PoE power supply up to 300W in total for all ports

AI Watchdog

Poe Extended 10 Mbps 250 meters

Specifications

Interfaces	24 ports RJ45 PoE + 2 Uplink RJ45 + 2 Uplink SFP
Port speed RJ45	24x 10/100Mbps + 4x 10/100/1000Mbps
PoE features	Up to 300W in total for all ports Ports 1~22 PoE+ Up to 30W 802.3af/at Port 23~24 Hi-PoE Up to 60W 802.3af/at/bt
Uplink ports	RJ45 25~26: 10/100/1000Mbps uplink ports SFP 27~28: 10/100/1000Mbps SFP uplink ports
Transmission distance	Port 1~24 130 meters 10/100Mbps, 250 meters 10 Mbps
Bandwidth	12.8 Gbps
MAC Table	8K
Latency	1000MBps < 16?s (using 64 byte of packet size)
AI PoE	PoE Watchdog Ports 1~24 - Automatic restart of the power supply to a PoE port when a possible failure is detected.
Power	Rear Socket 90~240V
Protections	6KV against Rays 8KV ESD Protection
Operating temperature	-30° C - 60° C
Dimensions	180 (D) x 45 (H) x 440 (W) mm
Weight	2,65Kg