


XS-AC1201-EMP

Access and Attendance control
EM RFID card and keypad
30.000 recordings / 150.000 records
TCP/IP, USB, RS485, Wiegand &
Relay
Valid for interior
Compatible with SmartPSS software

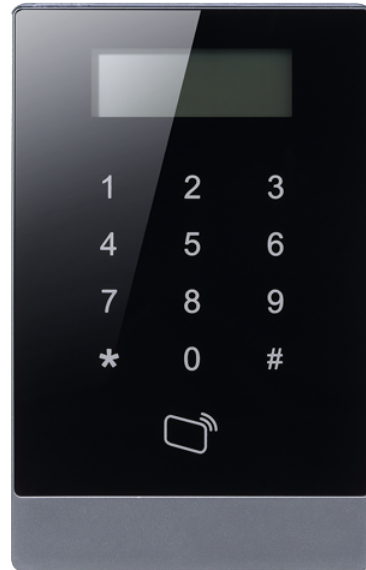

X-Security

Stand-alone reader of access and time & attendance
Identification via EM card, keycode and/or combinations
Keypad and LCD graphic display
Capacity or up to 30.000 users & 150.000 registers
128 groups, schedules and holiday calendars
Communication TCP/IP, RS485, miniUSB and Wiegand 26
Integrated controller (door sensor, push button, bell and relay)
Alarm input and output
Control of schedules, shifts and cycles
Anti-Passback and Lock Function
Complete SmartPSS management software included

Specifications

| | |
|-----------------------------|--|
| Brand | X-Security |
| Hardware CPU | 32 Bit Processor + 16MB RAM |
| Read time | < 0.1 Sec. |
| Capacity | Up to 30.000 EM RFID cards |
| Records | 150.000 registers |
| Identification modes | Card, PIN & combinations |
| Proximity card | EM RFID (125KHz) |
| Screen | 128 x 64 LED |
| Communication | TCP/IP, USB |
| Outputs | Wiegand OUT, RS485, Relay, Alarm, Doorbell |
| Inputs | Door sensor, Open button, Alarm |
| Special functions | Anti-passback, multi-card open |
| Software | SmartPSS |
| Power supply | DC 9~15 V / 200 mA max. |
| Temp. operation | -5° C ~ +55° C |
| Dimensions | 97 (W) x 150 (H) x 16 (D) mm |
| Weight | 300 g |