

ZENTO FAMILY

THE ZENTO IS ONE OF OUR MOST POPULAR SECURITY GATES, TRIED AND TRUSTED IN THOUSANDS OF RETAIL OUTLETS IN EUROPE AND AROUND THE GLOBE.

The Zento is an extruded aluminium lightweight yet robust antenna, perfectly matching to your store interior and non-obtrusively fulfilling its task.

Designed with maximum transparency, minimising entrance obstruction yet offers maximum detection of hard tags and disposable tags in challenging store environments.




The Zento is available in **RF** with TX/RX and TRX versions, with PC connection and remote monitoring available for TRXs.



ZENTO FAMILY (DISTANCE DATA BETWEEN ANTENNAS)



	# Product No.	TRx mono	Shield on side	Detection 4x4 paper label (normal/max)	Detection round hardtag (normal/max)
L-Line (Large)					
Zento L-150 RF AFT-TRx	P0200352	yes		2/2,4m 78/94in	2,4/2,8m 78/110in
Zento L-170 RF AFT-TRx	P0200349	yes		2/2,4m 78/94in	2,4/3m 94/118in
Zento L-150 RF Tx/Rx	P0200291/*2			3/3,4m 118/134in	3,8/4,2m 150/165in
N-Line (Normal)					
Zento N-150 Light RF AFT-TRx	P0200389	yes		1,8/2,2m 70/86in	2,2/2,6m 86/102in
Zento N-150 RF Tx/Rx	P0200297/*8			2,8/3,2m 110/126in	3,6/4m 140/157in
Zento N-150 RF AFT-TRx	P0200353	yes		1,8/2,2m 70/86in	2,2/2,6m 86/102in
S-Line (Slim)					
Zento S-170 RF AFT-TRx	P0200368	yes		1,2/1,6m 47/62in	1,6/2m 62/78in
Zento S-170 RF AFT-TRX ISSH	P0200367	yes	yes	1,1/1,5m 43/59in	1,4/1,8m 55/70in

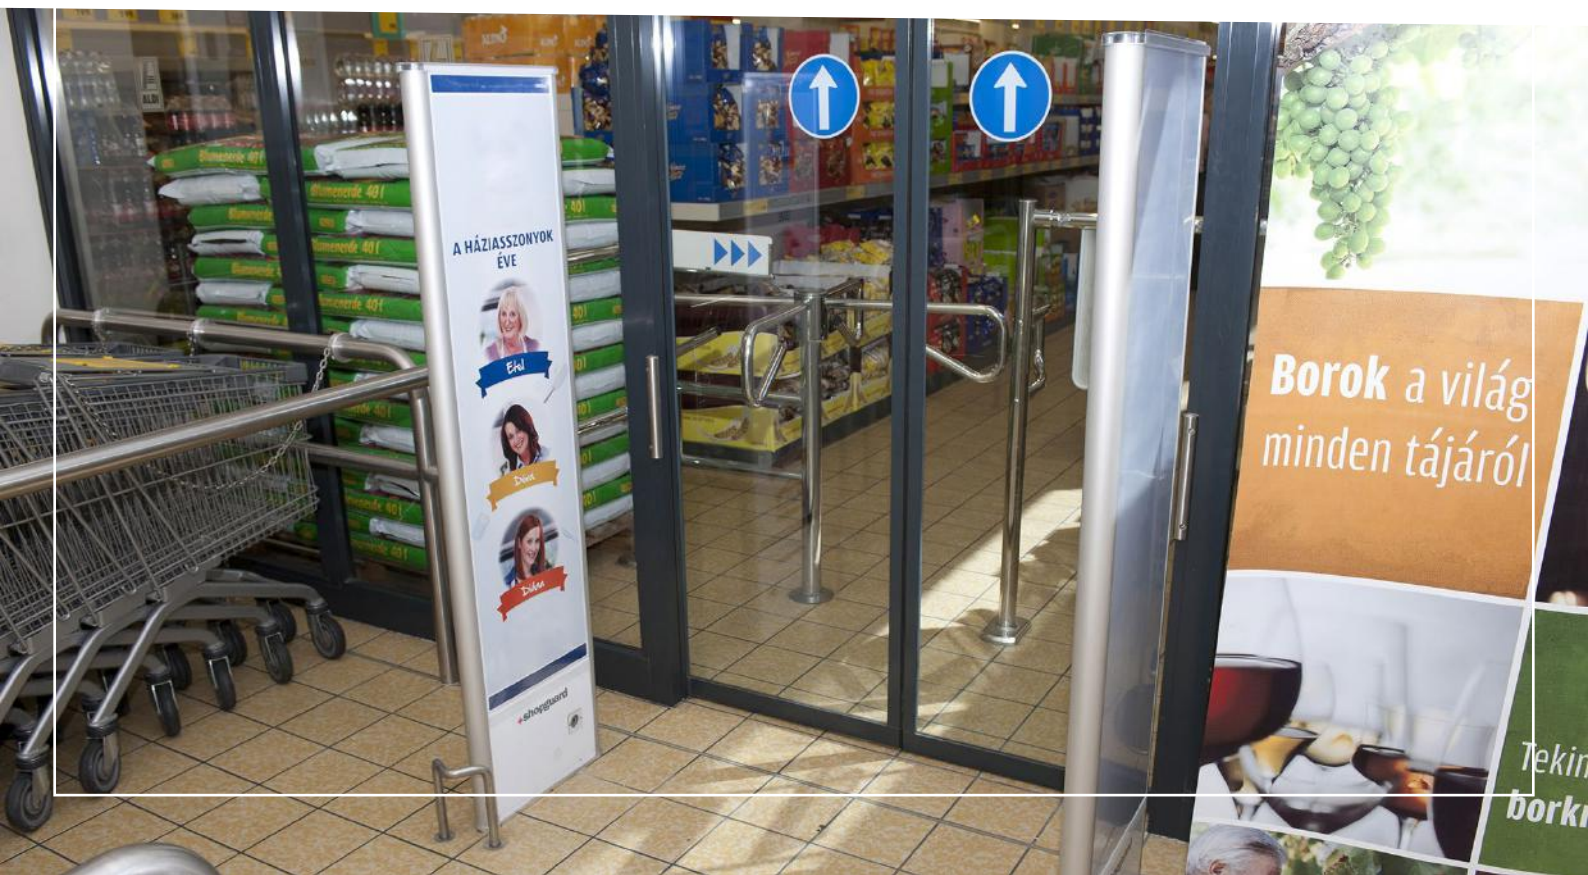

ADVERTISING INSERT SIZE

	# Product No.	Height	visible height	Width	visible width
L-Line (Large)					
Zento L-150 RF AFT-TRx	P0200352	1265mm	1246mm	450mm	434mm
Zento L-170 RF AFT-TRx	P0200349	1465mm	1446mm	450mm	434mm
Zento L-150 RF Tx/Rx	P0200291/*2	1265mm	1246mm	450mm	434mm
N-Line (Normal)					
Zento N-150 Light RF AFT-TRx	P0200389	1228mm	1208mm	350mm	334mm
Zento N-150 RF Tx/Rx	P0200297/*8	1265mm	1246mm	350mm	334mm
Zento N-150 RF AFT-TRx	P0200353	1265mm	1246mm	350mm	334mm
S-Line (Slim)					
Zento S-170 RF AFT-TRx	P0200368	1410mm	1391mm	250mm	234mm
Zento S-170 RF AFT-TRX ISSH	P0200367	1410mm	1391mm	250mm	234mm



Zento N-150 RF Tx/Rx

P0200297 / P0200298

General Info	
Family	Zento
Size	Normal
Type	Tx / Rx system

Recommendation	metric	imperial
4x4 paper label		
Norm/Max Distance*	2,8/3,2m	110/126in
Norm/Max On side*	1,4/1,6m	55/63in
Recommendation	metric	imperial
round hardtag		
Norm/Max Distance*	3,6/4m	140/157in
Norm/Max On side*	1,8/2m	70/78in
Dimension		
Height	1,526m	60in
Width	0,411m	16.2in
Depth (thickness)	0,061m	2.4in
Approx. weight	7,7kg	17lbs

Electrical Requirements		
PSU	24V DC	
Power Consumption	4W/16,5W	
Operating Temp.	0 - 40 °C	32 - 104 °F

Other	
Antenna Safety	CB, UL/cUL
Emissions Safety	FCC/IC, CE
Materials Used	aluminium side, plastic insert and body

*detection distance may vary, depends on **environment** and **tag type**.



Available colours



white

Tx/Rx duo

TRx Alternating Field