


Access Controls / X-Security / Controllers

XS-AC2204-C

X-SECURITY

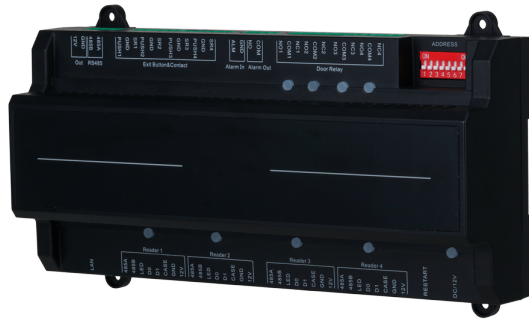

Features

- X-Security
- Access Controller
- Management of 4 doors
- Capacity 100.000 users and 500.000 records
- Supports up to 4 Wiegand or OSDP readers
- TCP/IP Communication
- Input of 4 push buttons, 4 door sensors and 1 auxiliary input
- 4 relay outputs and 1 alarm output
- Relay configuration NO/NC
- Compatible with SmartPSS software for management of access control and reports

Specifications

Brand	X-Security
Model	XS-AC2204-C
Hardware CPU	32bit CPU
Capacity	Up to 3.000 fingerprints and 100.000 cards/passwords Up to 100.000 users
Records	500.000 registers
Identification modes	Fingerprint, card and/or passwords
Proximity card	RFID EM (125 kHz) and MF (13.56 MHz)
Communication	TCP/IP OSDP Wiegand
Outputs	4 x relay output, 1 x alarm output, 1 x 12 V DC
Inputs	4 x Wiegand 26/34 IN, 4 x OSDP, 4 x door sensor, 4 x open button, 1 x alarm input
Software	SmartPSS
Power	DC 12 V / 500 mA max. / (IEEE802.3af) PoE
Temp. operation	-30° C ~ +60 °C
Dimensions	210 (W) x 106 (H) x 50 (D) mm
Weight	600 g